
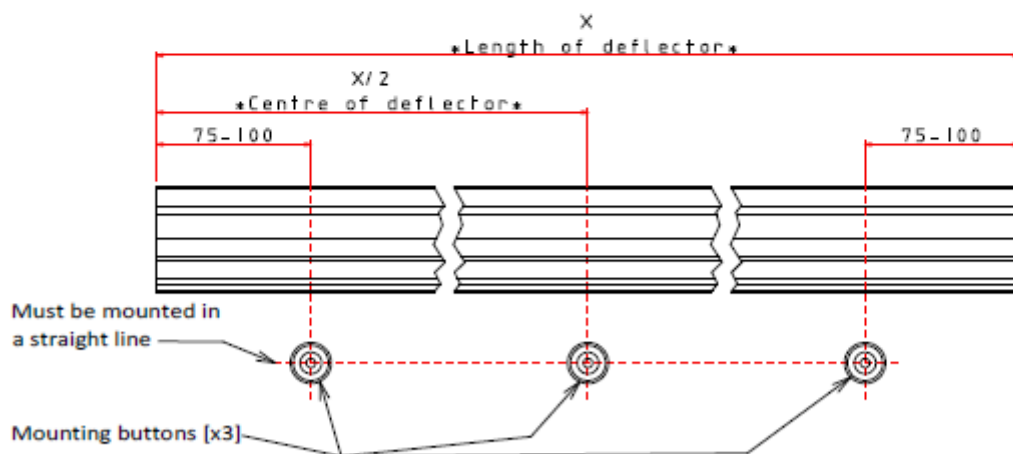


## Expelex MK2 Conceal Fix Deflector

Bottom of deflector must not foul on the top of gasket during opening and closing of door

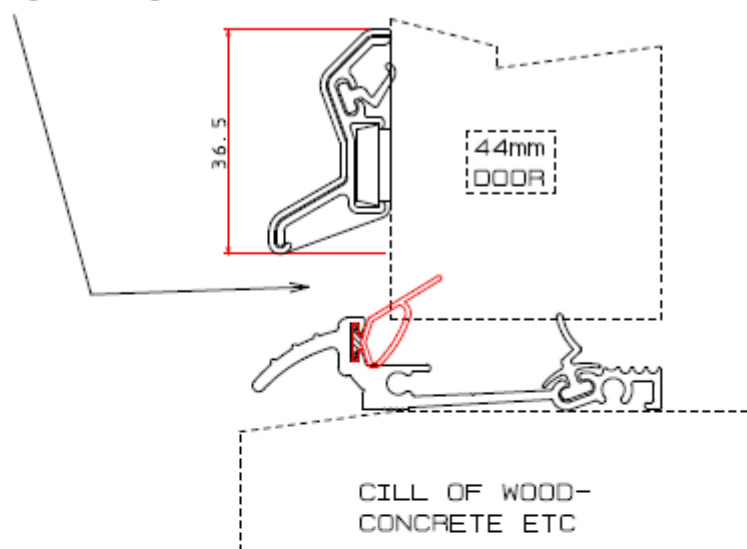

Mark desired fixing hole positions on door - ensuring that they are in a straight line.  
Using screws supplied, screw buttons firmly onto the door - buttons must not be able to spin freely, however, ensure that the screws arent overtightened.

Line deflector up on top of buttons - using moderate pressure, snap the deflector onto buttons.  
Fit endcaps to ends of deflector.



**Finishes available:**

Black Ral 9005, Blue Ral 5711, Gold, Bright Silver, Chartwell Green, Anthracite Grey, White Ral 9003, Cream, Heather Ral 4010, Plum Ral 4007, Grey Ral 7015, Silver Grey Ral 7001, Pebble Ral 7035, Buttercup, Cherry, Dusk, Midnight, Olive, Sky Blue, Red Ral 3011, White Ral 9010, Grey Ral 7016, Green Ral 6009, Blue Ral 5011, Sky Blue, White Ral 9016

**Standard length:**

914mm

**Fixing Locations:**

75mm-100mm from each end

Centre button at 457mm

**Number of Fixings Required:**

3 buttons per 914mm length