


Fitting Instructions

1. Cut the aluminium to length. The correct measure is taken across the outside edges of the door less 6mm for Protective Deflecting End Caps. Ensure the bottom sealing blade and Surface seal are left 10mm longer than the aluminium. Or, if you have an inward opening side hinged garage door and your frame has a rebate, measure the actual door width if you prefer to notch the Garex into the doorframe rebate.

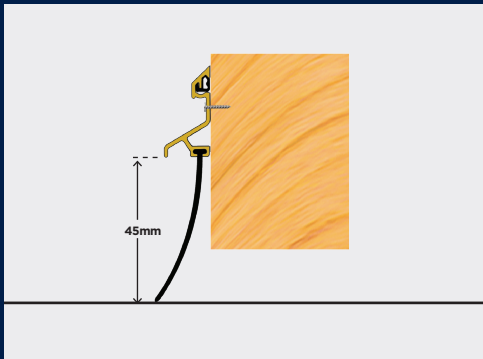

2. With the Garex deflector cut to the correct length, leave a sealing blade extending by 5mm at each end, pinch the end of the seal retaining channel on both sides of the door. This ensures that the sealing blade remains into position during opening and closing of the door.
3. Slightly flatten the fins on anchoring tongue and push the aluminium into the entire recess in the End Cap. Place a small amount of Elast O Sealant onto the endcap to help retention.
4. Position Garex deflector ensuring the sealing blade contacts the ground with the door closed. Screw rivet into position onto door. Ensure a fixing screw or pop rivet is inserted within 25mm of the edges of the door to secure endcaps. Drill extra holes if necessary.

Note: If you are screwing Garex into a single thickness of metal door, it is suggested you place a strip of wood on the inside to receive the excess length of the screws.



SEALED IN QUALITY

Exitex Ltd
Dundalk
Ireland
T: (+353 42) 9371244
Email: info@exitex.com

www.exitex.com