



# Joinery Seals & Glazing

Sealed in quality  
[exitex.com](http://exitex.com)

For Timber Windows  
& Doors



All Exitex sealing and glazing systems are manufactured to the highest standards, incorporating many unique patented features.

# Quality you can trust

---

Aluminium  
Hardened High Tensile  
to BS 1474

---

Anodising  
15-25 Micrometers  
BS 3987

---

Powder Coating  
60-80 Micrometers  
BS 6496

---

EPDM  
Gaskets to BS 4255

---

EPDM  
Cellular Rubber  
Gaskets to  
SS 243705A1, SS81813

---

PVC  
Gaskets to BS 7412

---



# Joinery Seals & Glazing

For Timber Windows  
& Doors

## Contents

---


●	Aquatex™	4
●	Weatherseals for Sliding Sash Windows	10
●	Self Adhesive Seals	20
●	Joinery Seals Wiper	21
●	Joinery Seals Compression	22
●	Aluminium Glazing Beads & Accessories	28
●	Self Adhesive EPDM Dry Glaze Profiles	31
●	Glazing Wedge Gasket for Secret Nailing	32
●	Push Fit & Single Sided Glazing Gaskets	34
●	Double Sided Tapes	35
●	Tilt & Turn Weatherbar	38
●	Securbead	40
●	Lokbead	42
●	Timber Bead Glazing Clips	44
●	Glazing Accessories	46
●	Intumescent Seals	48
●	Automatic Door Bottom Seals	51

# High Performance Weatherseals for Windows & Doors

Key Performances	Materials
Temperature Range: -40°C to +70°C. Compression Set: <15% UV Stability: 5000 hrs QUV tester. UVB 313 bulb. (4hrs light / 4hrs dark cycle)	Outer skin. Polyethylene. (Properties include: inert, low friction, UV stable, colour options) Foam Core. Polyurethane. (Properties include: excellent memory over extended temp range) Inserts. Polypropylene (Properties include: longitudinal stability and secure fixing)

## Features

- P.U. foam core provides excellent recovery after long-term deflection.
- Working temperature range -40°C to +70°C
- Thicker polyethylene outer sheathing improves resistance to wear & tear.
- Deflection ranges to cope with tolerance & seasonal movement of seal gap.
- Excellent UV stability.
- Outer skin not affected by paints & stains.
- Aquatex™ does not propagate mould growth or mildew.
- Standard colours brown, white & black.

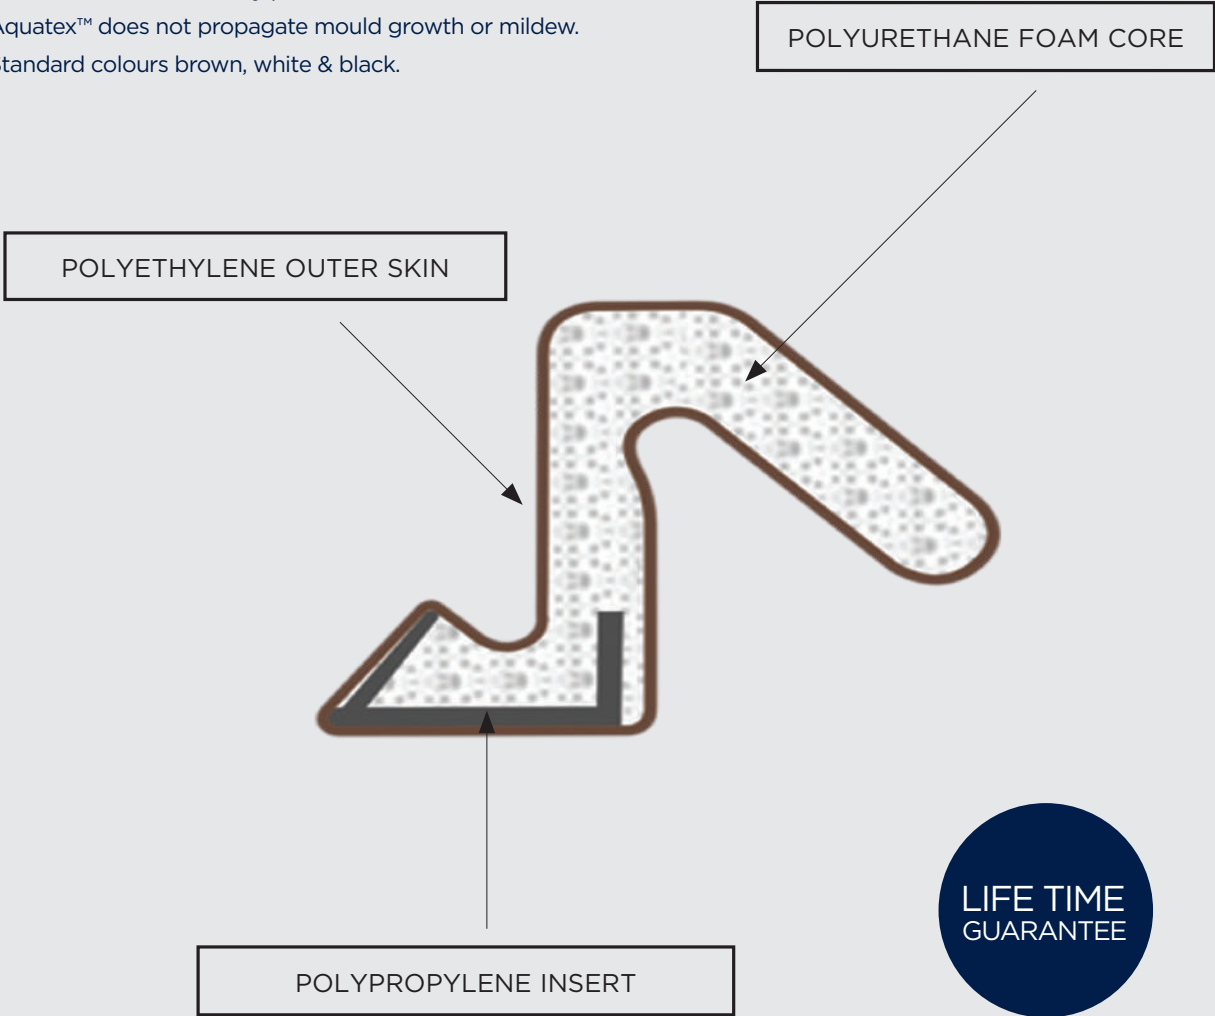

## Aquatex A15

Seals gaps 9 - 15mm


Conforms to BS 12365-12003

Classification W72560

2.1m Lengths, 125L/Box

Available in white, brown & black

Ref: 1.27.0065

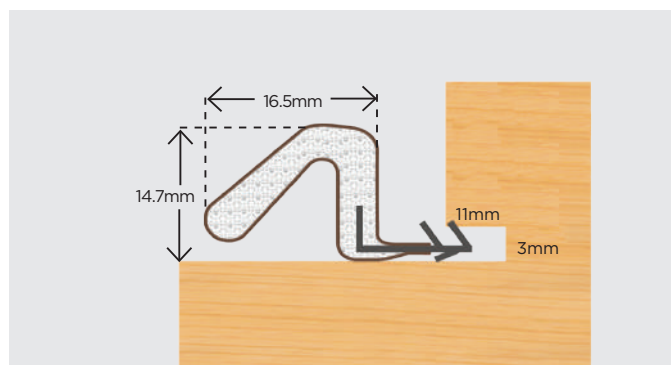

## Aquatex A14

Seals gaps 10 - 15mm


Conforms to BS 12365-12003

Classification W72560

2.1m Lengths, 150L/Box

Available in white, brown & black

Ref: 1.27.0189

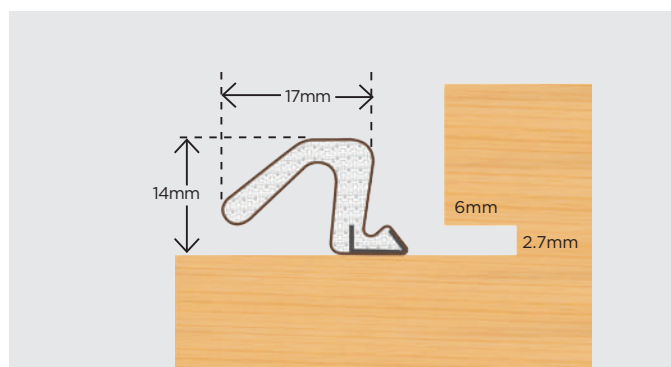

## Aquatex A13

Seals gaps 5.5 - 12mm


Conforms to BS 12365-12003

Classification W62560

350m/Box (2 x 175m)

Available in white, brown & black

Ref: 1.28.0700

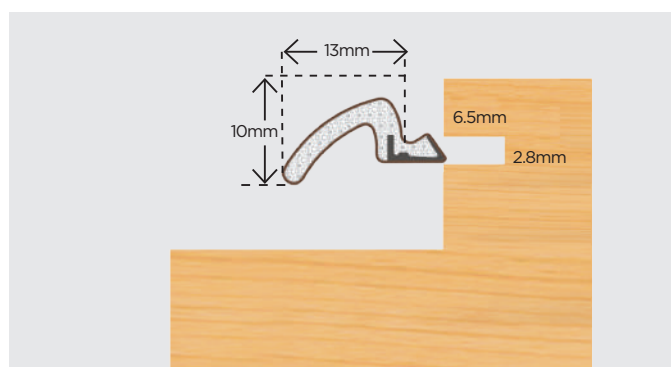

## Aquatex A10

Seals gaps 4.5 - 8mm


Conforms to BS 12365-12003

Classification W32560

10m, 25m, 100m, 500m/Box (2 x 250m)

Available in white, brown & black

Ref: 1.27.0021

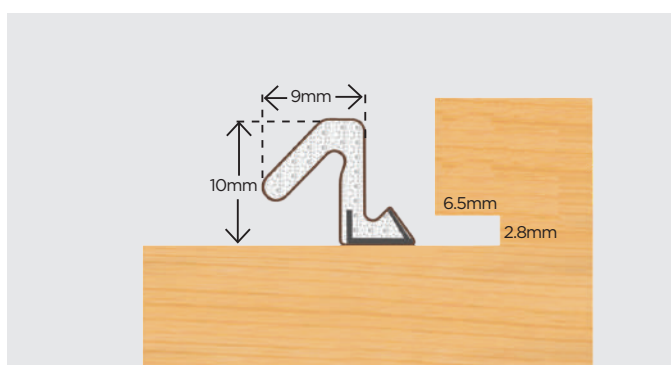

## Aquatex A9

Seals gaps 6 - 11.5mm


Conforms to BS 12365-12003

Classification W52560

400m/Box (2 x 200m)

Available in white, brown & black

Ref: 1.27.0569

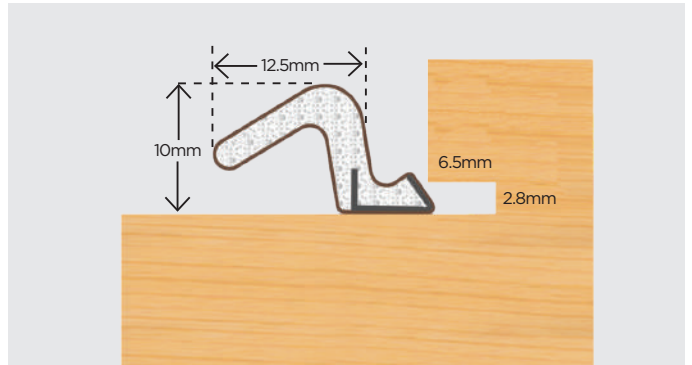

## Aquatex A5

Seals gaps 4 - 8.5mm


Conforms to BS 12365-12003

Classification W43560

600m/Box (2 x 300m)

Available in white, brown & black

Ref: 1.27.0562

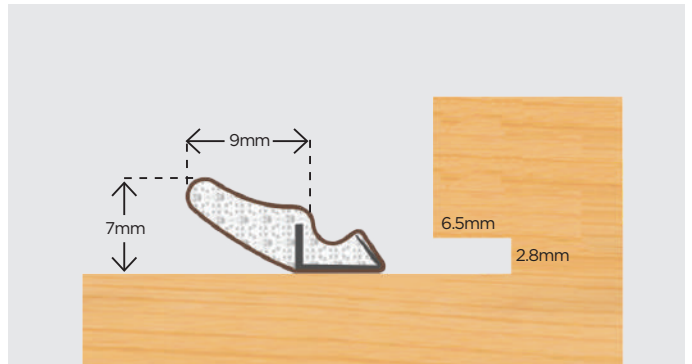

## Aquatex P3

Seals gaps 4 - 6.4mm


Conforms to BS 12365-12003

Classification W26560

400m/Box (2 x 200m)

Available in white, brown & black

Ref: 1.27.0033

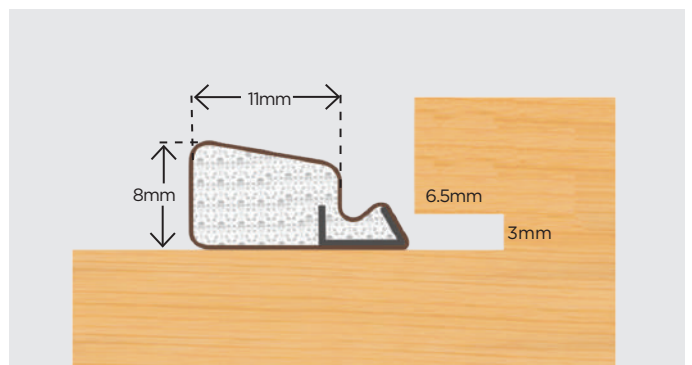

## Aquatex P6

Seals gaps 4 - 6mm


Conforms to BS 12365-12003

Classification W23560

600m/Box (2 x 300m)

Available in white, brown & black

Ref: 1.27.0063

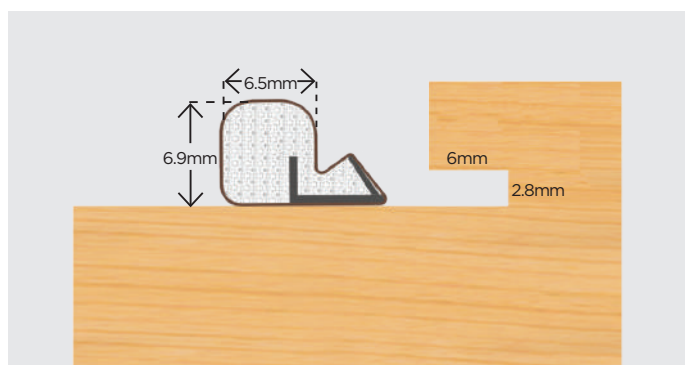

## Aquatex P8

Seals gaps 2 - 3.5mm


Conforms to BS 12365-12003

Classification W15560

10m, 25m, 100m, 700m/Box (2 x 350m)

Available in white, brown & black

Ref: 1.27.0048

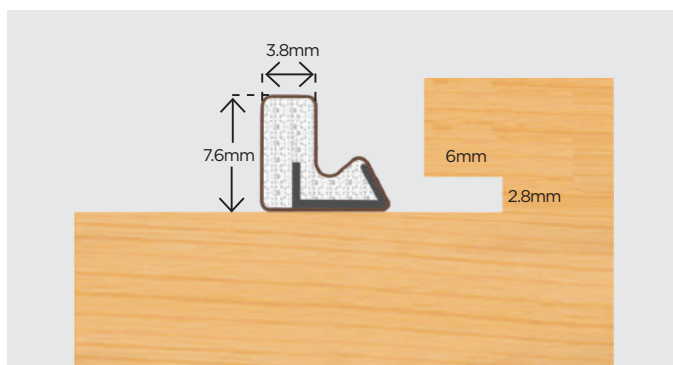

## Aquatex P9

Seals gaps 2.8 - 4.5mm


Conforms to BS 12365-12003

Classification W15560

600m/Box (2 x 300m)

Available in white & black

Ref: 1.27.0154

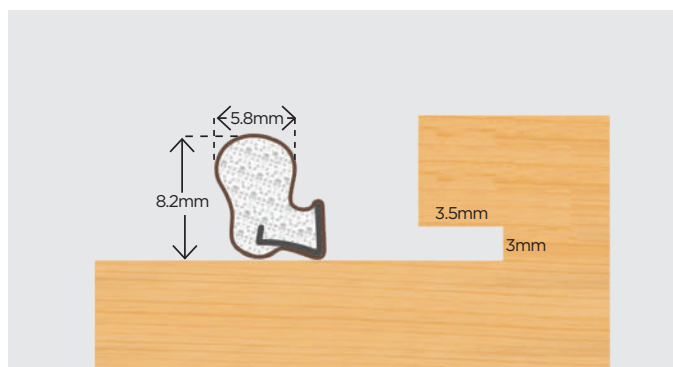

## Aquatex P10

Seals gaps 3.5 - 5.5mm


Conforms to BS 12365-12003

Classification W45560

500m/Box (2 x 250m)

Available in white, brown & black

Ref: 1.27.0484

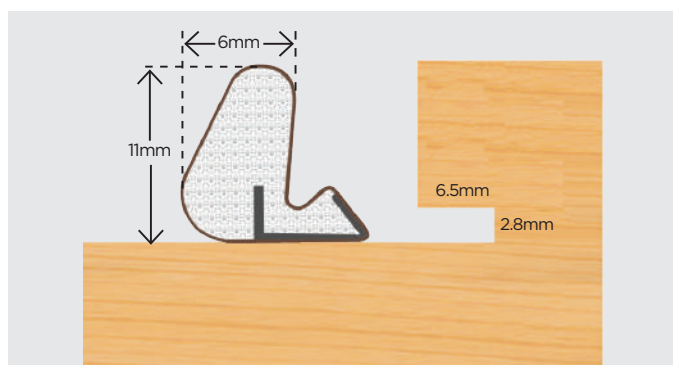

## Aquatex P11

Seals gaps 4.5 - 6mm


Conforms to BS 12365-12003

Classification W35560

10m, 25m, 100m, 500m/Box (2 x 250m)

Available in white, brown & black

Ref: 1.27.0109

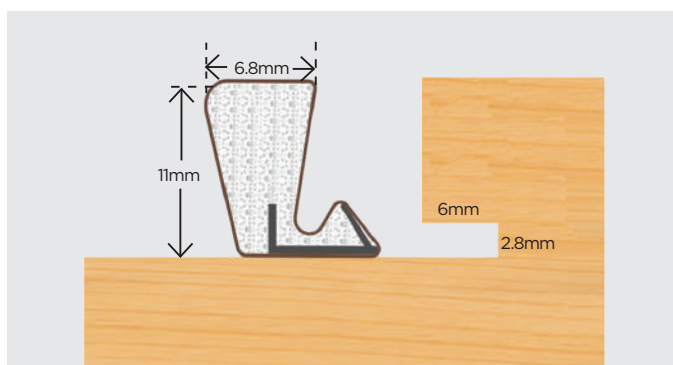



## Aquatex S20

Seals gaps 5 - 7.5mm


Conforms to BS 12365-12003

Classification W43560

250m/Box (2 x 125m)

Available in white, brown & black

Ref: 1.27.0124

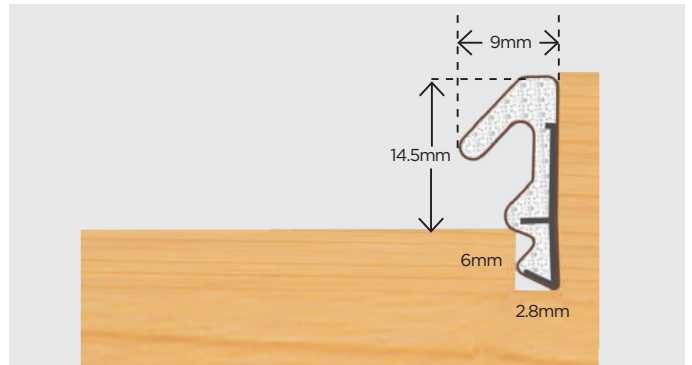

## Aquatex S21

Seals gaps 5 - 8mm


Conforms to BS 12365-12003

Classification W33560

300m/Box (2 x 150m)

Available in white, brown & black

Ref: 1.28.0091

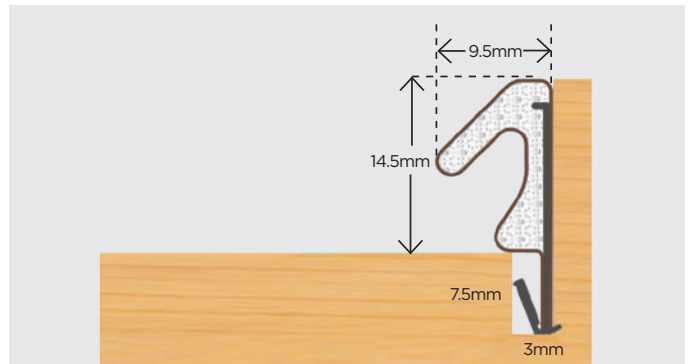

## Aquatex S22

Seals gaps 5 - 8mm


Conforms to BS 12365-12003

Classification W33560

300m/Box (2 x 150m)

Available in white, brown & black

Ref: 1.27.0310

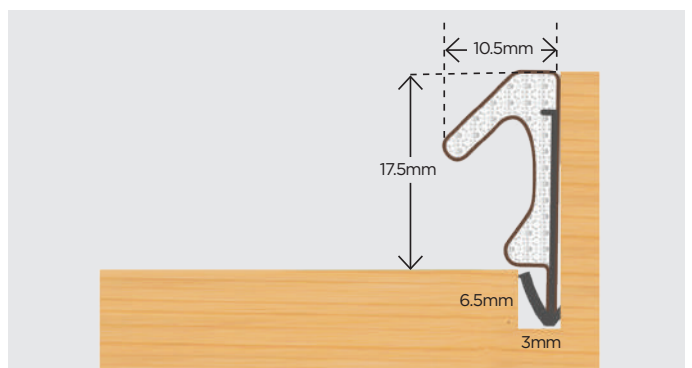

## Aquatex S25

Seals gaps 5 - 6.5mm


Conforms to BS 12365-12003

Classification W34560

200m/Box (2 x 100m)

Available in white, brown & black

Ref: 1.28.0097

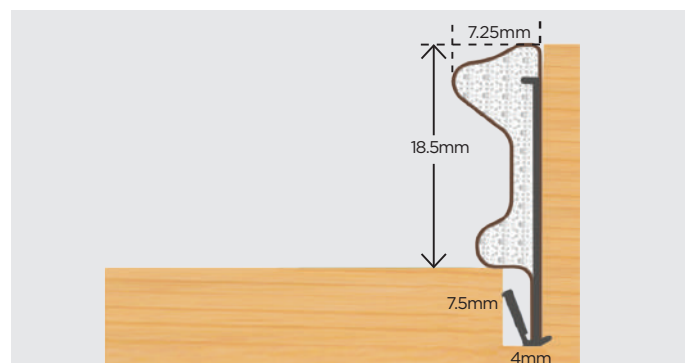



## Aquatex D Slot 4.8mm x 5mm

Seals gaps 3.5 - 4.8mm


Conforms to BS 12365-12003

Classification W14560

1220m/Box (2 x 610m)

Available in white, brown & black

Ref: 1.28.0069



## Aquatex D Slot 4.8mm x 6.5mm

Seals gaps 4.5 - 6mm


Conforms to BS 12365-12003

Classification W24560

900m/Box (2 x 450m)

Available in white, brown & black

Ref: 1.28.0070



## Aquatex D Slot 4.8mm x 7.5mm

Seals gaps 5.5 - 7mm


Conforms to BS 12365-12003

Classification W23560

600m /Box (2 x 300m)

Available in white, brown & black

Ref: 1.28.0071



## Aquatex D Slot 4.8mm x 9.5mm

Seals gaps 6.5 - 9 mm


Conforms to BS 12365-12003

Classification W24560

600m/Box (2 x 300m)

Available in white, brown & black

Ref: 1.28.0072





Weatherseals for Sliding Sash Windows

**A** Pile Carrier, Slidex, Staff Seal

**B** Parting Bead

**C** Meeting Rail Pile Carrier

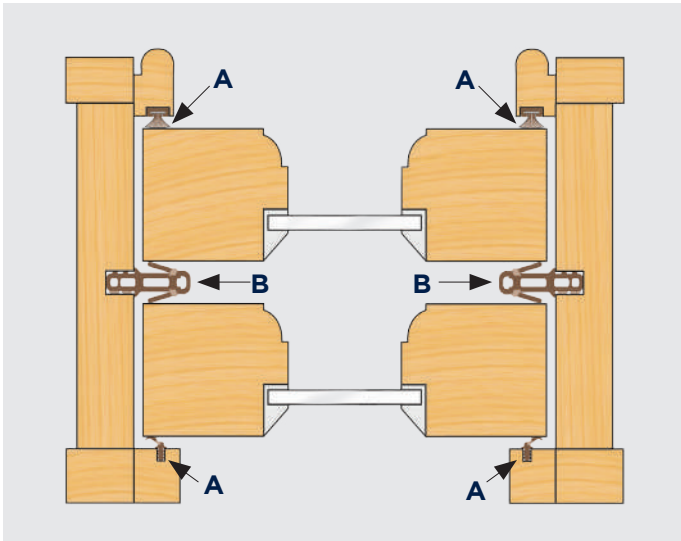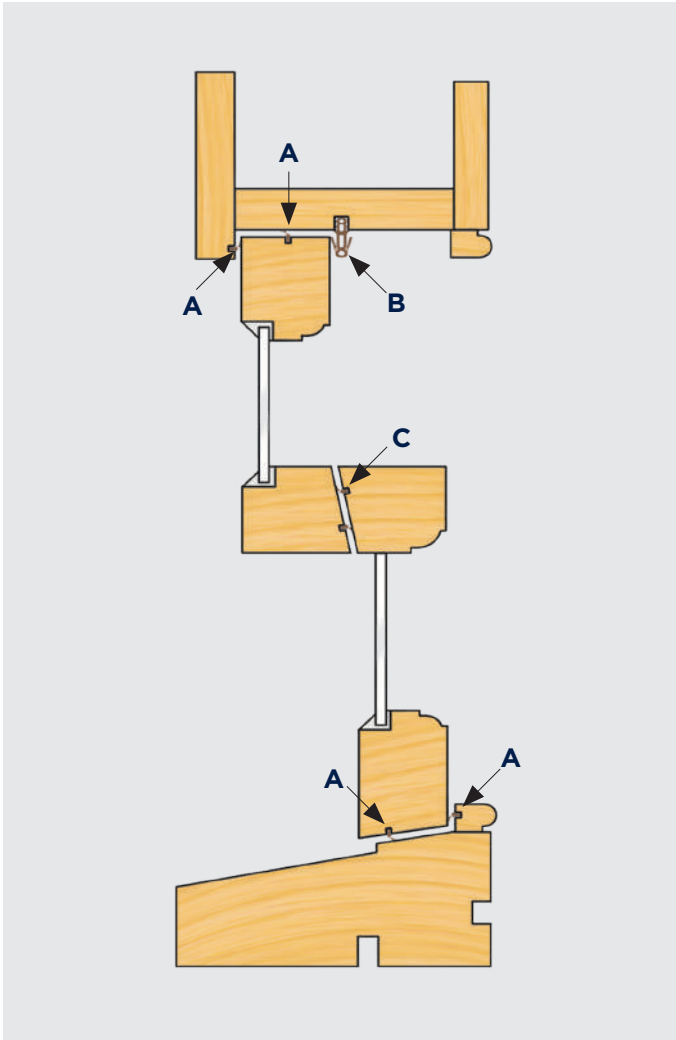


## Parflip 12mm

Ref: 1.10.0180

Length - 3m

Available in brown, white & cream

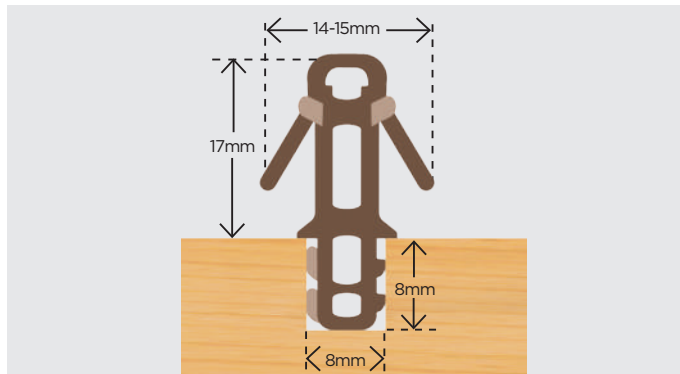


## Parflip 16mm

Ref: 1.10.0181

Length - 3m

Available in brown, white & pine

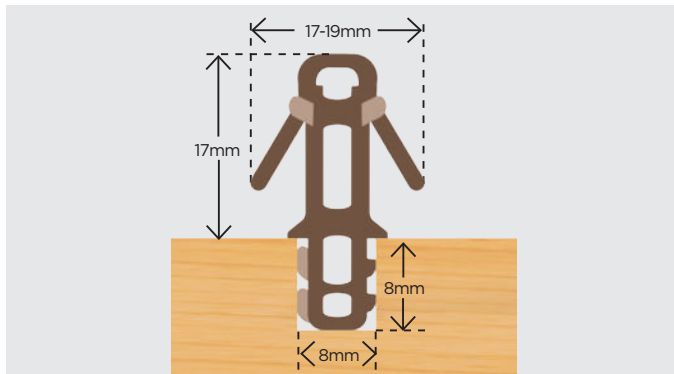


## Partex

Ref: 1.10.0175

Length - 3m

Available in brown, white & cream

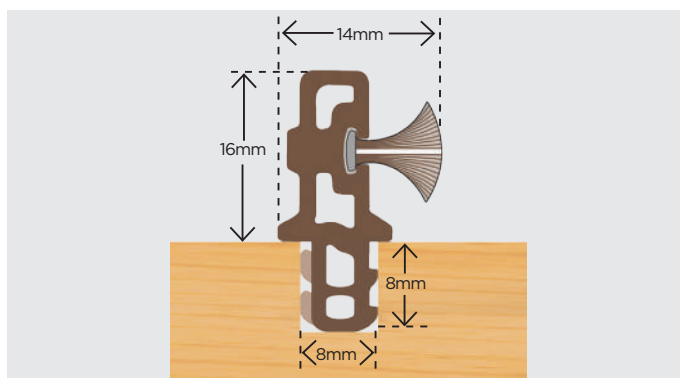


## Partex c/w D-slot 4.8mm x 7.5mm

Ref: 1.10.0186

Length - 3m

Available in brown & white

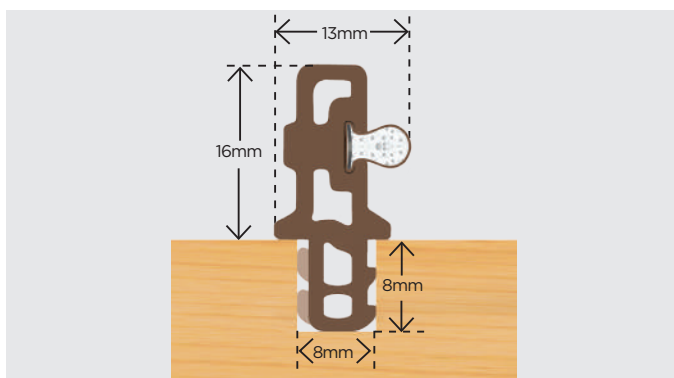


## Retaining Profile 10mm for Partex/Parflip

Ref: 1.10.0190

Length - 3m

Available in brown, white & cream

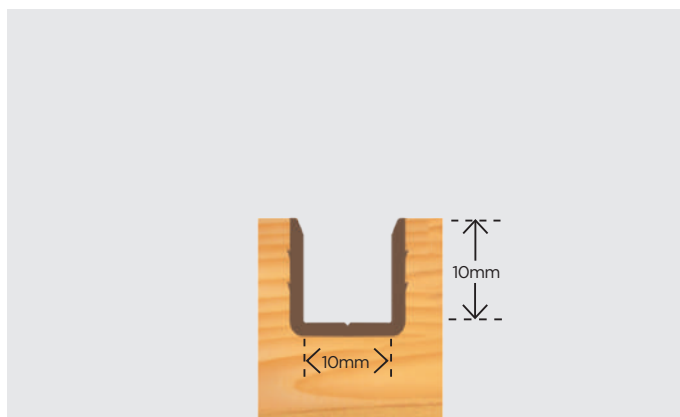


## Meeting Rail Pile Carrier c/w 6.5mm Pile & Fin

Ref: 1.10.0425

Length - 3m

Available in brown & white

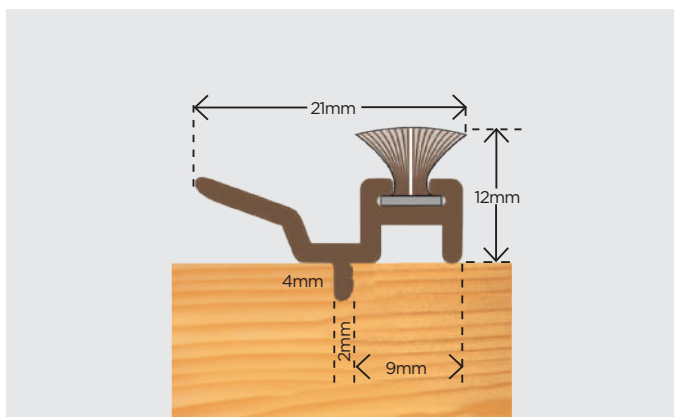


Weatherseals For Sliding Sash Windows

Timber Parting Bead with Pile Carrier  
7mm x 25mm / 8mm x 25mm

Length - 3m

Available in - primed & unprimed

Ref: 1.40.0001 (7mm)      Ref: 1.40.0002 (8mm)

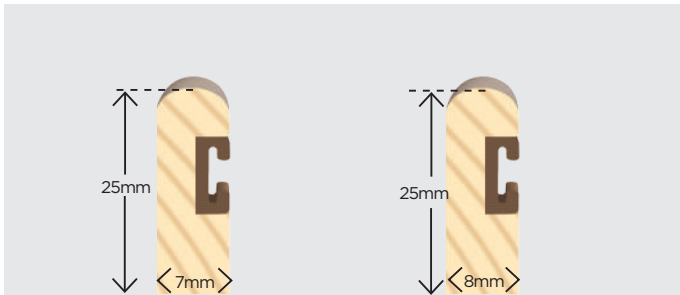


Timber Parting Bead with Carrier  
& 6.5mm Pile & Fin  
7mm x 25mm / 8mm x 25mm

Length - 3m

Available in - primed & unprimed

Ref: 1.40.0003 (7mm)      Ref: 1.40.0004 (8mm)

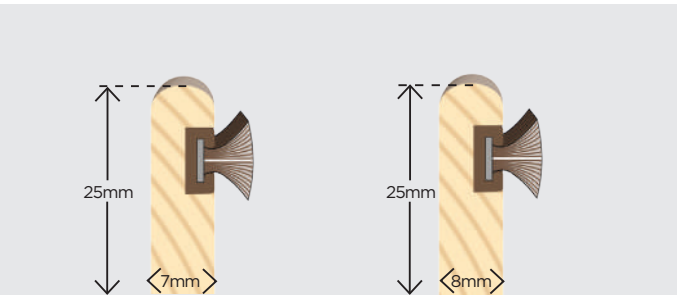


Timber Parting Bead with Pile Carrier  
7mm x 28mm / 8mm x 28mm

Length - 3m

Available in - primed & unprimed

Ref: 1.40.0005 (7mm)      Ref: 1.40.0006 (8mm)

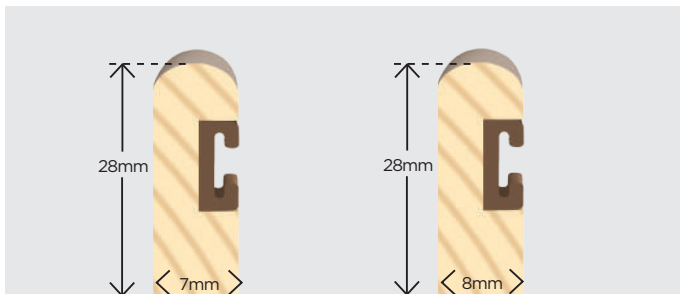


Timber Parting Bead with Carrier  
& 6.5mm Pile & Fin  
7mm x 28mm / 8mm x 28mm

Length - 3m

Available in - primed & unprimed

Ref: 1.40.0007 (7mm)      Ref: 1.40.0008 (8mm)

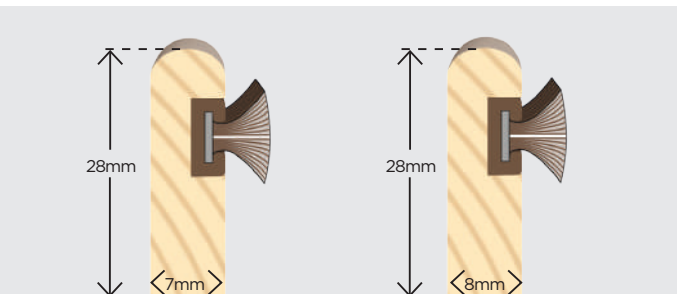


Timber Parting Bead with Pile Carrier  
14mm x 22mm

Length - 3m

Available in - primed & unprimed

Ref: 1.40.0009

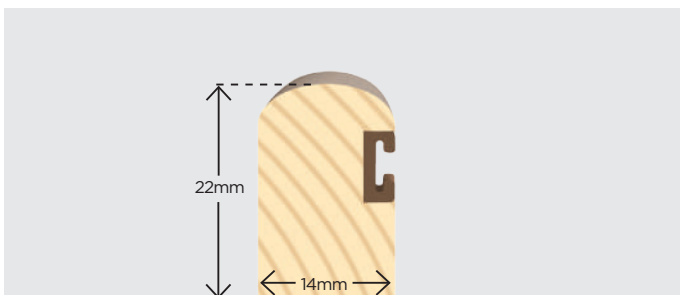


Timber Parting Bead with Carrier  
& 6.5mm Pile & Fin 14mm x 22mm

Length - 3m

Available in - primed & unprimed

Ref: 1.40.0010

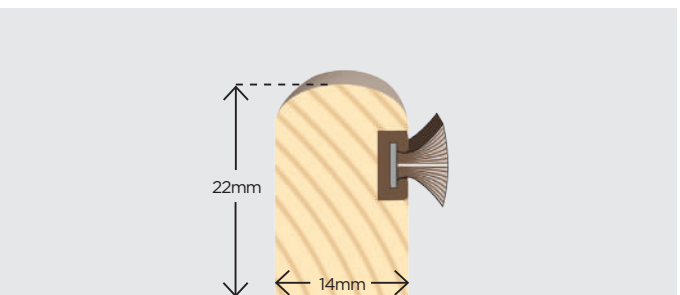


## Timber Staff Bead 20mm x 15mm with Pile Carrier

Length - 3m

Available in primed & unprimed

Ref: 1.40.0011

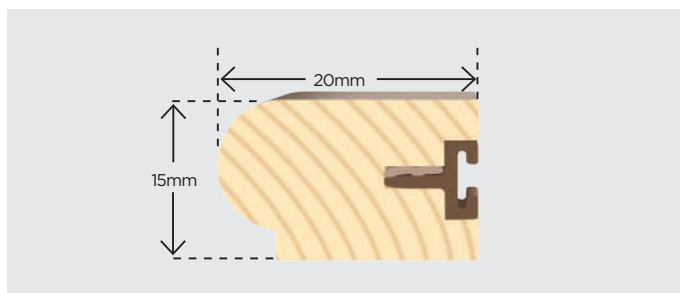


## Timber Staff Bead 20mm x 15mm with Carrier & 6.5mm Pile & Fin

Length - 3m

Available in primed & unprimed

Ref: 1.40.0012

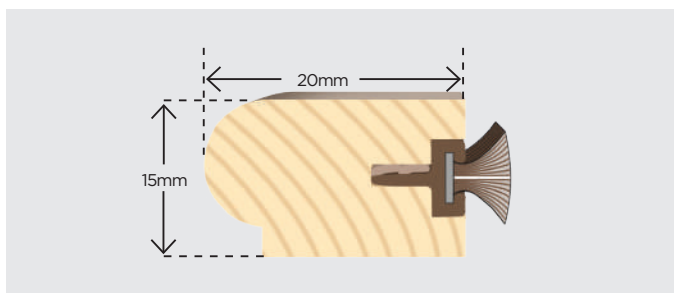


## Timber Staff Bead 25mm x 15mm with Pile Carrier

Length - 3m

Available in primed & unprimed

Ref: 1.40.0013

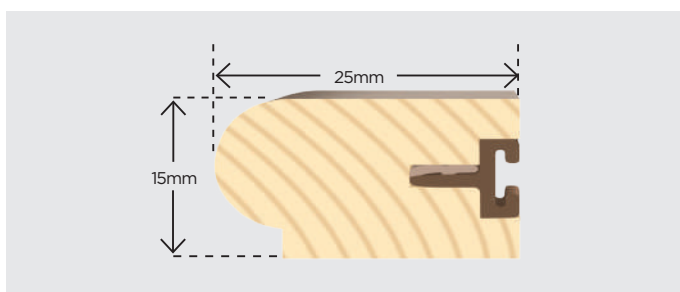


## Timber Staff Bead 25mm x 15mm with Carrier & 6.5mm Pile & Fin

Length - 3m

Available in primed & unprimed

Ref: 1.40.0014

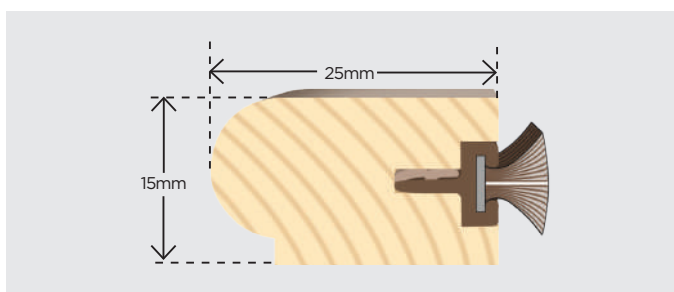


## Timber Staff Bead 28mm x 15mm with Pile Carrier

Length - 3m

Available in primed & unprimed

Ref: 1.40.0023

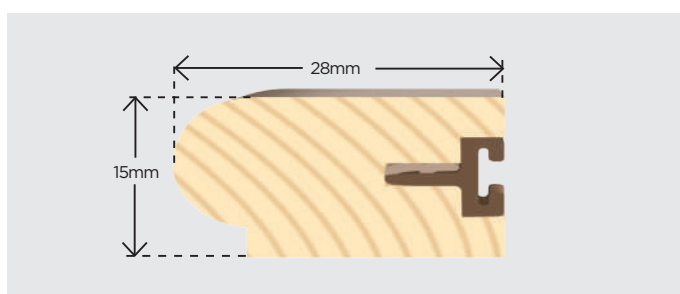


## Timber Staff Bead 28mm x 15mm with Carrier & 6.5mm Pile & Fin

Length - 3m

Available in primed & unprimed


Ref: 1.40.0024

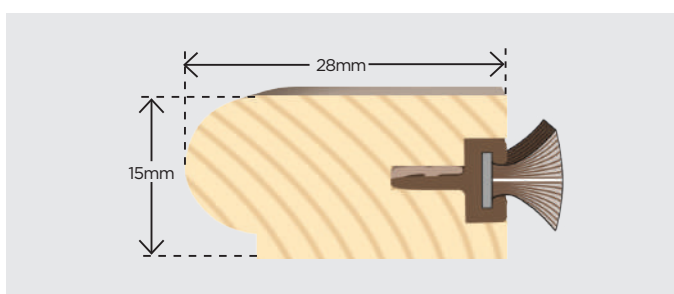

Weatherseals For Sliding Sash Windows


Timber Staff Bead 20mm x 20mm with Pile Carrier

Length - 3m  
Available in primed & unprimed

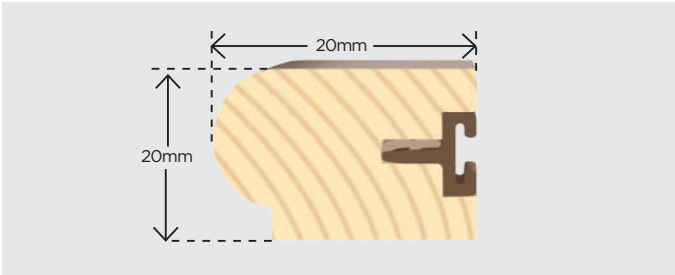


Timber Staff Bead 20mm x 20mm with Carrier & 6.5mm Pile & Fin

Length - 3m  
Available in primed & unprimed

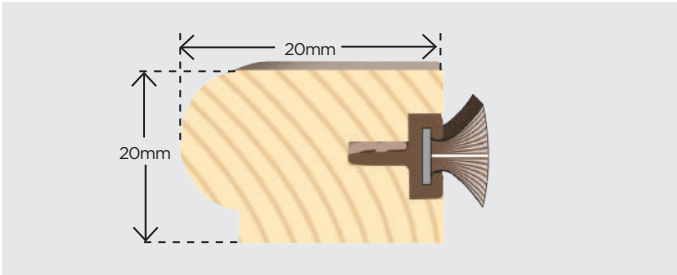


Timber Staff Bead 24mm x 20mm with Pile Carrier

Length - 3m  
Available in primed & unprimed

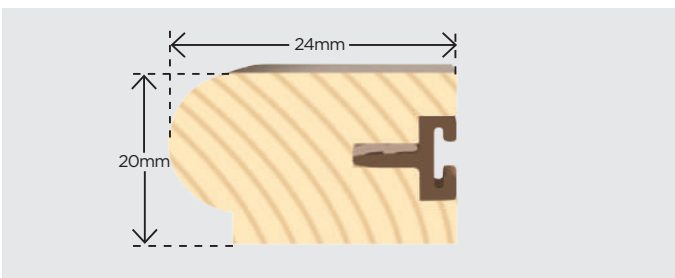


Timber Staff Bead 24mm x 20mm with Carrier & 6.5mm Pile & Fin

Length - 3m  
Available in primed & unprimed

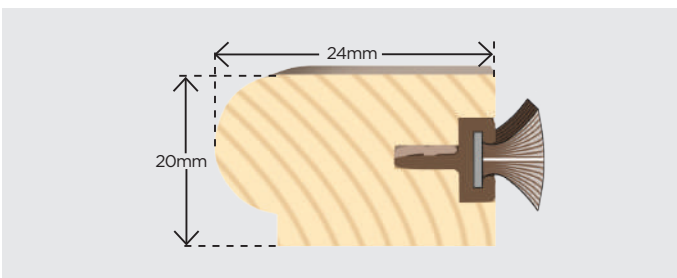


Timber Staff Bead 28mm x 20mm with Pile Carrier

Length - 3m  
Available in primed & unprimed

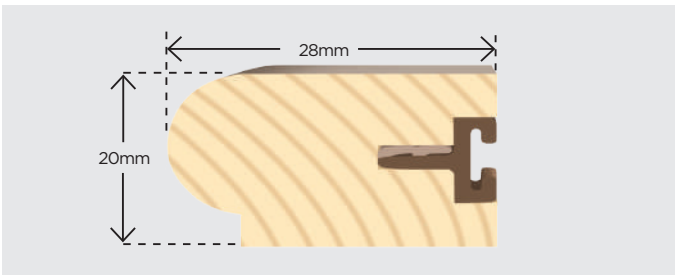


Timber Staff Bead 28mm x 20mm with Carrier & 6.5mm Pile & Fin

Length - 3m  
Available in primed & unprimed

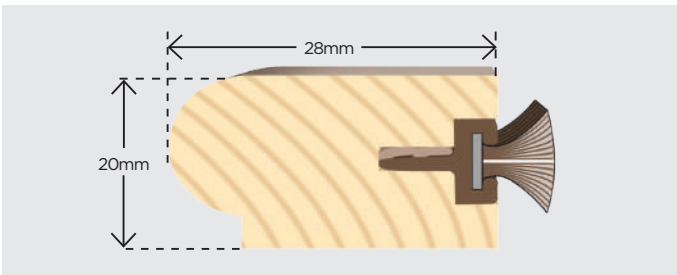


Timber Staff Bead 33mm x 16mm with Pile Carrier

Length - 3m  
Available in primed & unprimed

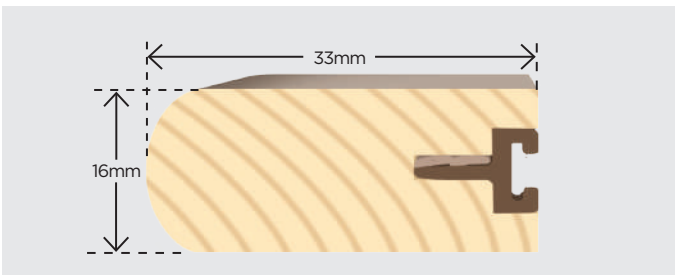


Timber Staff Bead 33mm x 16mm with Carrier & 6.5mm Pile & Fin

Length - 3m  
Available in primed & unprimed

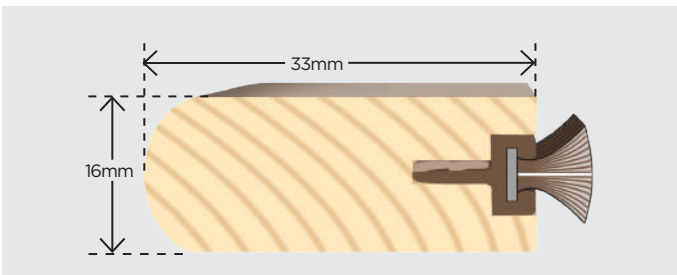


### Offset Leg Carrier

Length - 2.2m  
Available in brown & white  
Ref: 1.10.0310

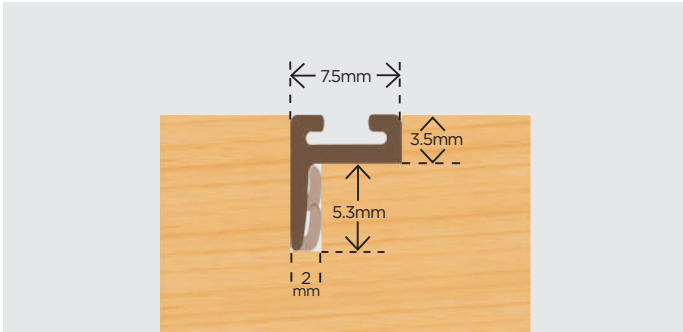


### Centre Leg Carrier

Length - 2.2m  
Available in brown & white  
Ref: 1.10.0300

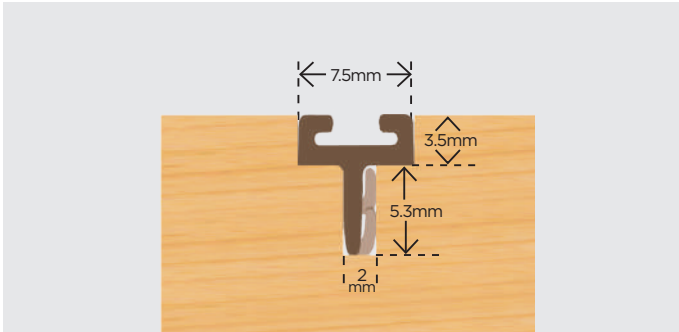


### Self Adhesive Carrier

Length - 2.2m  
Available in brown & white  
Ref: 1.10.0320

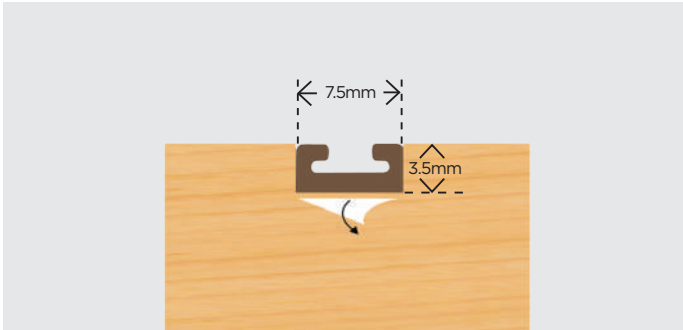


### Non Adhesive Carrier

Length - 2.2m  
Available in brown, white & black  
Ref: 1.10.0340

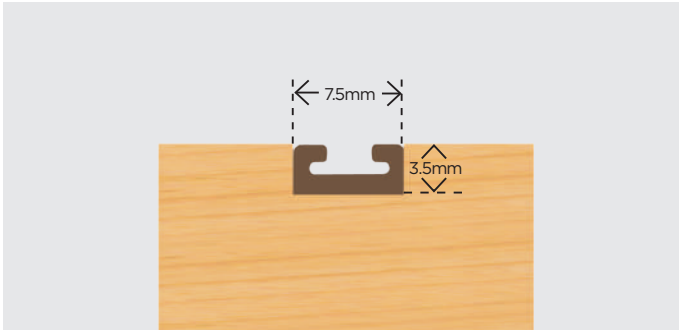


### Offset Leg Pile Carrier with 6.5mm Pile & Fin

Length - 2.2m  
Available in brown & white  
Ref: 1.10.0311

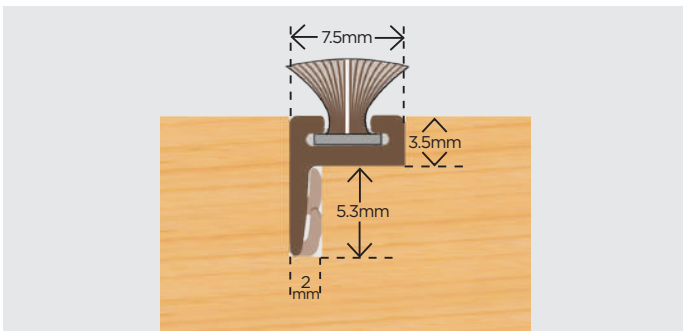

### Centre Leg Pile Carrier with 6.5mm Pile & Fin

Length - 2.2m  
Available in brown & white  
Ref: 1.10.0301

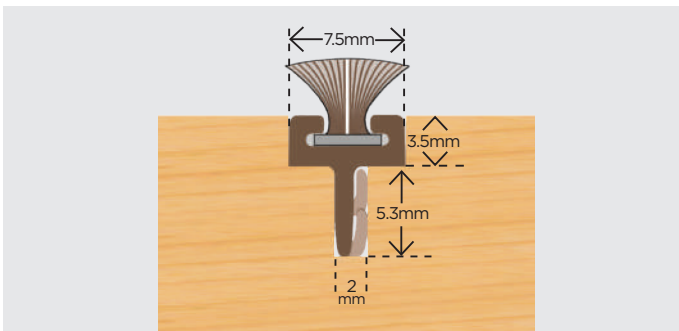




## Weatherseals For Sliding Sash Windows

### Self Adhesive Pile Carrier with 6.5mm Pile & Fin

Length - 2.2m

Available in brown & white

Ref: 1.10.0321

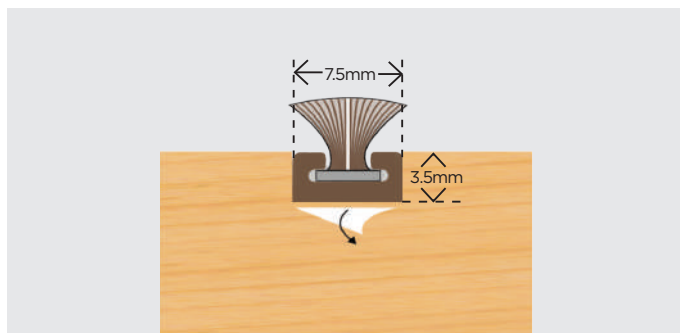


### Non Adhesive Pile Carrier with 6.5mm Pile & Fin

Length - 2.2m

Available in brown & white

Ref: 1.10.0326

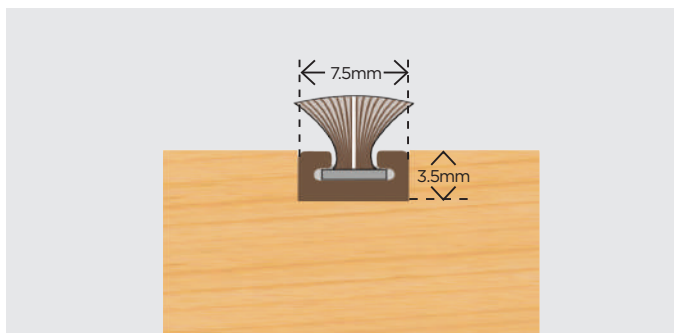


### Offset Leg Carrier with D slot 6.5mm

Length - 2.2m

Available in brown & white

Ref: 1.10.0362

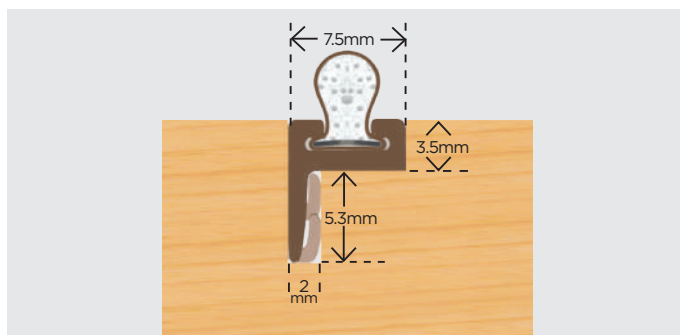


### Centre Leg Carrier with D slot 6.5mm

Length - 2.2m

Available in brown & white

Ref: 1.10.0361

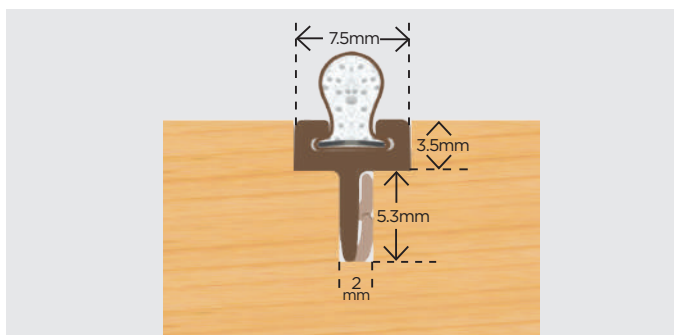


### Self Adhesive Carrier with D slot 6.5mm

Length - 2.2m

Available in brown & white

Ref: 1.10.0360

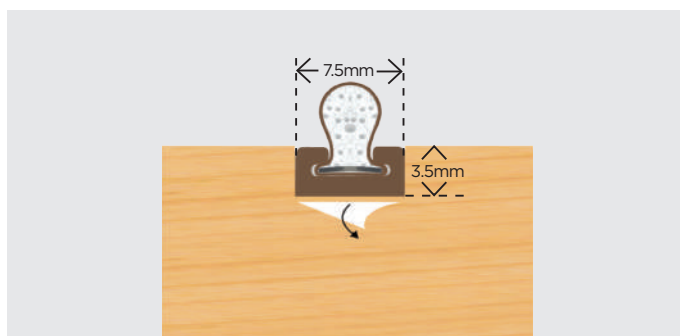


### Non Adhesive Carrier with D slot 6.5mm

Length - 2.2m


Available in brown & white

Ref: 1.10.0363

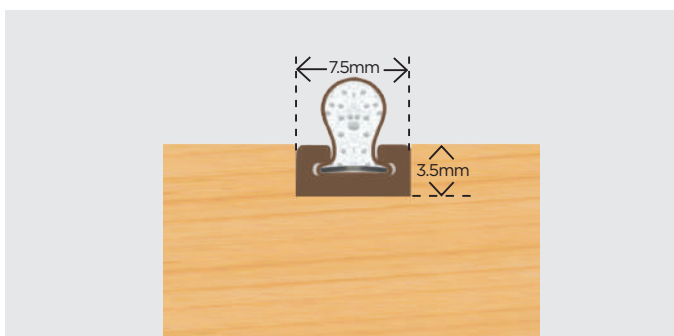


Slide Pile 4.8mm x 5mm with Fin

Roll Size: 100m  
Available in white, grey & brown  
Ref: 1.06.0351

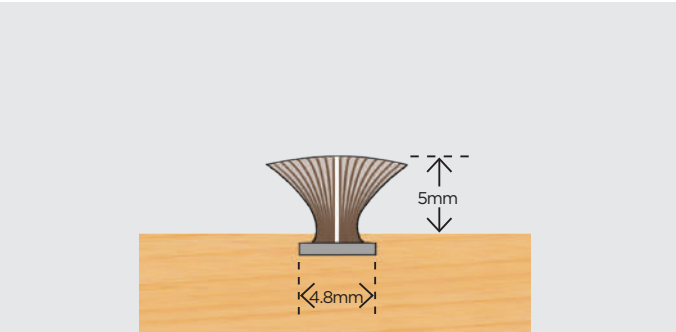


Slide Pile 4.8mm x 6.5mm with Fin

Roll Size: 100m  
Available in white, grey & brown  
Ref: 1.06.0354

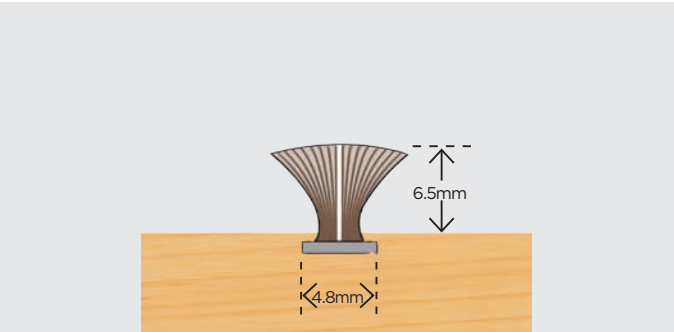


Slide Pile 4.8mm x 8.5mm with Fin

Roll Size: 100m  
Available in white, grey & brown  
Ref: 1.06.0357

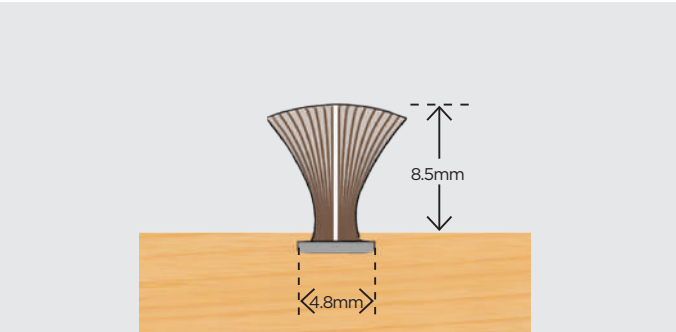


Slide Pile 4.8mm x 12mm with Fin

Roll Size: 100m  
Available in grey  
Ref: 1.06.0369

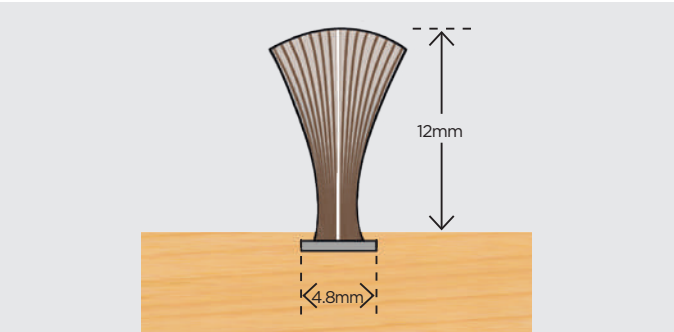


Slide Pile 6.7mm x 7mm

Roll Size: 250m  
Available in grey  
Ref: 1.06.0386

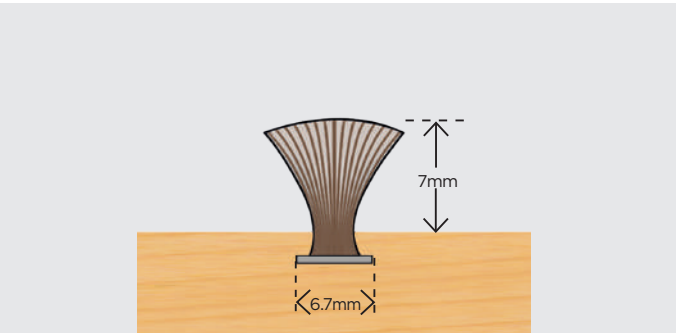

Slide Pile 6.7mm x 11mm

Roll Size: 200m  
Available in grey  
Ref: 1.06.0513

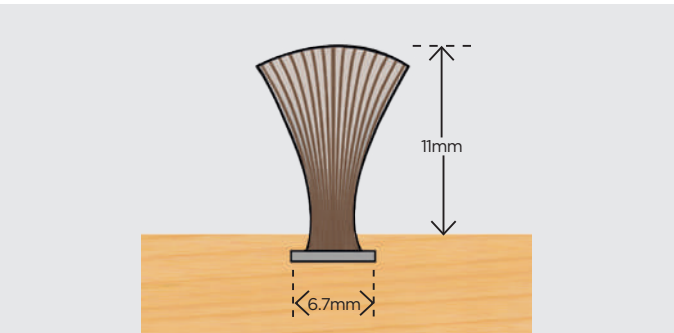


## Weatherseals For Sliding Sash Windows

### Slide Pile 6.7mm x 12mm with Fin

Roll Size: 200m

Available in grey

Ref: 1.06.0368

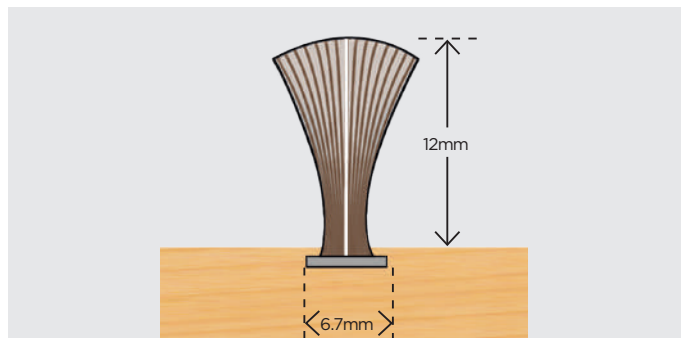

### Slide Pile 6.9mm x 13mm (with & without fin)


Roll Size: 200m

Available in grey without fin

Available in black with fin

Ref: 1.06.0371

Ref: 1.06.0514

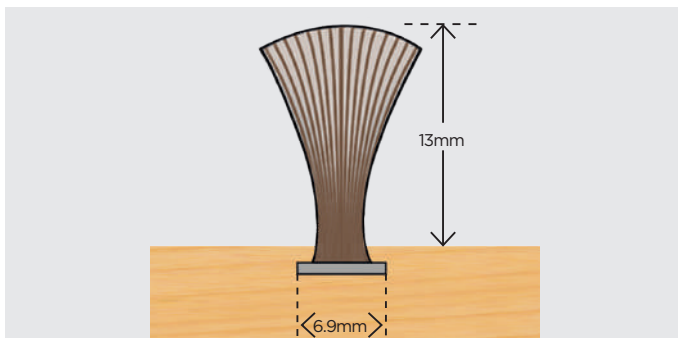


### Slide Pile 6.9mm x 14mm

Roll Size: 150m

Available in grey

Ref: 1.06.0501

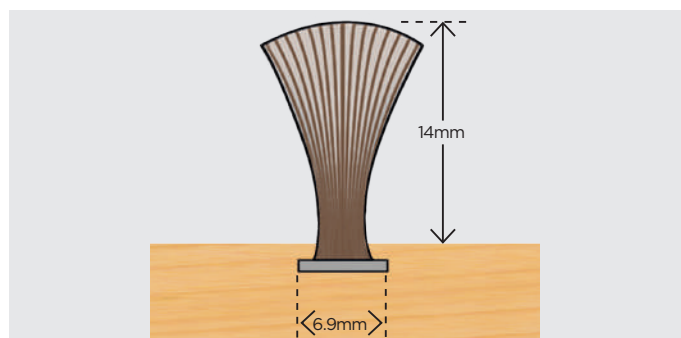


### Self Adhesive Pile 6.7mm x 5mm

Roll Size: 100m

Available in white, grey & brown

Ref: 1.06.0348

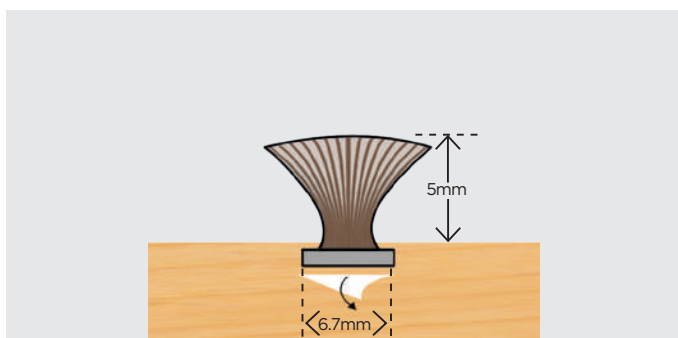


### Self Adhesive Pile 6.7mm x 10mm

Roll Size: 200m

Available in grey

Ref: 1.06.0361

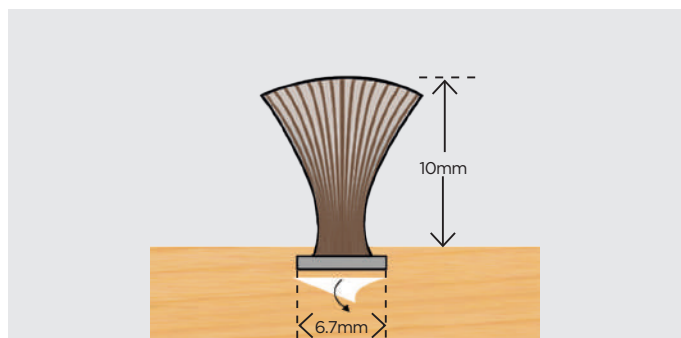


### Self Adhesive Pile 5mm x 12mm

Roll Size: 150m

Available in grey

Ref: 1.06.0364

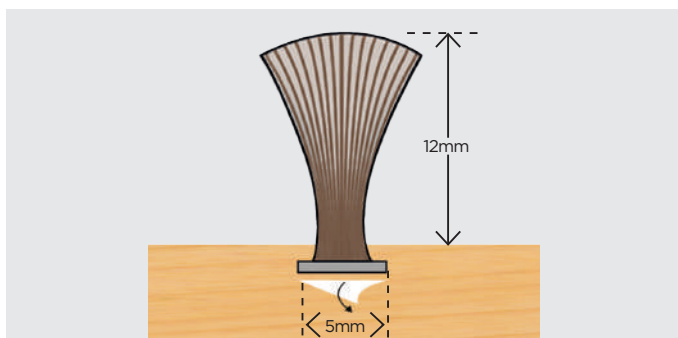


### TCT Cutter 1/4" Shank for 4.8mm Base Pile

Ref: 1.25.0020




### TCT Cutter 1/4" Shank for Self Adhesive Pile Carrier

Ref: 1.25.0035

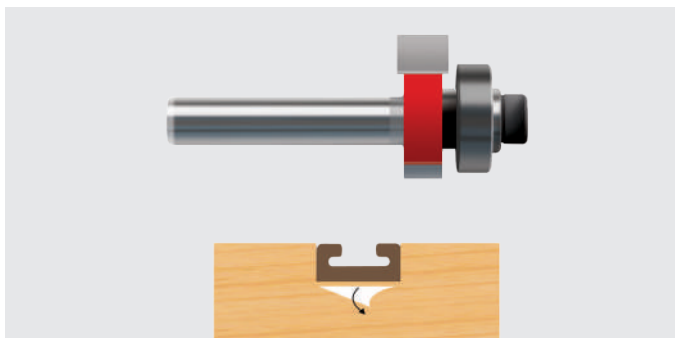


### TCT Cutter 1/2" Shank for Centre Leg Pile Carrier

Ref: 1.25.0025

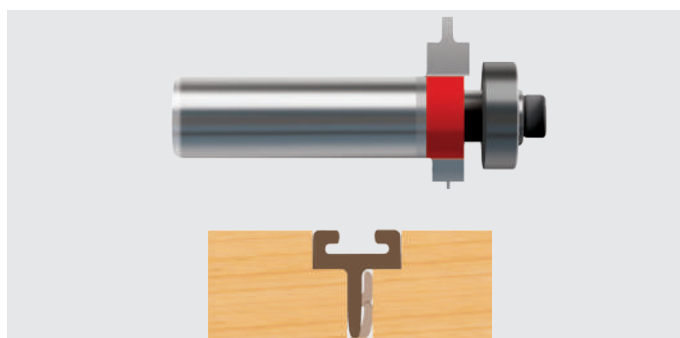

### TCT Cutter 1/2" Shank for Offset Leg Pile Carrier

Ref: 1.25.0030

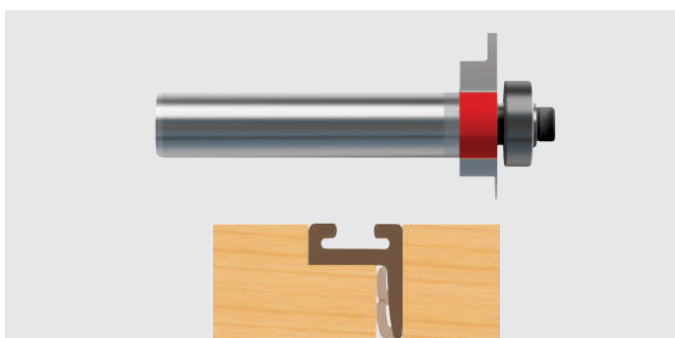


### Staff Seal

Length - 2.4m

Available in brown & white

Ref: 1.10.0420

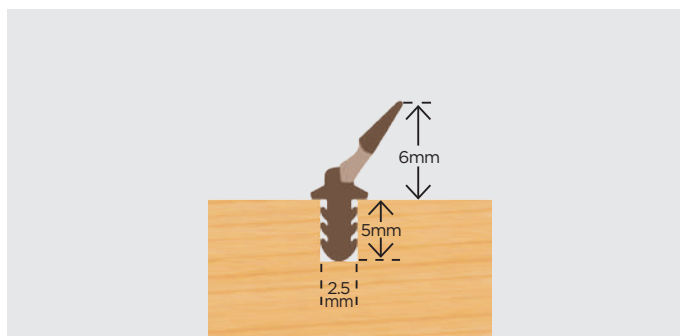


### Slidex

Length - 3m

Available in brown & white

Ref: 1.10.0115

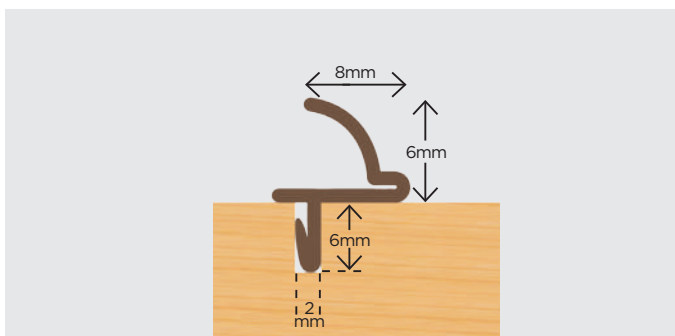


## Self Adhesive Seals

### E Strip 4mm x 9mm

Roll - 100m, self adhesive

Available in brown & white

Ref: 1.03.0001

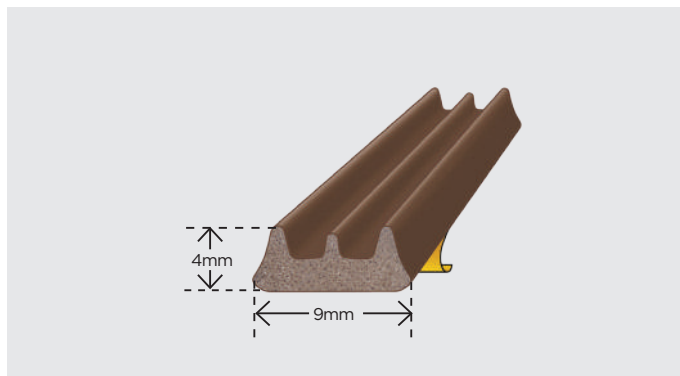


### P Strip 9mm x 5.5mm

Roll - 100m, self adhesive

Available in black, brown & white

Ref: 1.03.0002

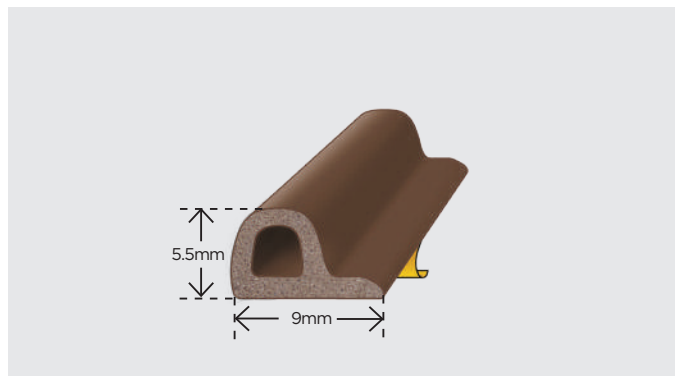


### V Strip 9mm x 7mm

Roll - 100m, self adhesive

Available in brown & white

Ref: 1.03.0003

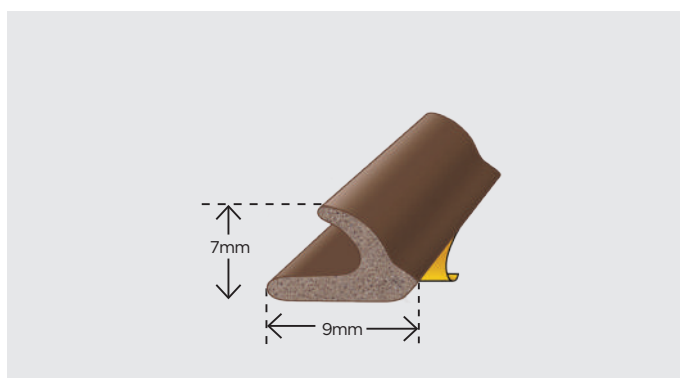


### V Flap 12.5mm x 12.5mm

Length - 2.1m, self adhesive

Available in black, white & brown

Ref: 1.03.0008

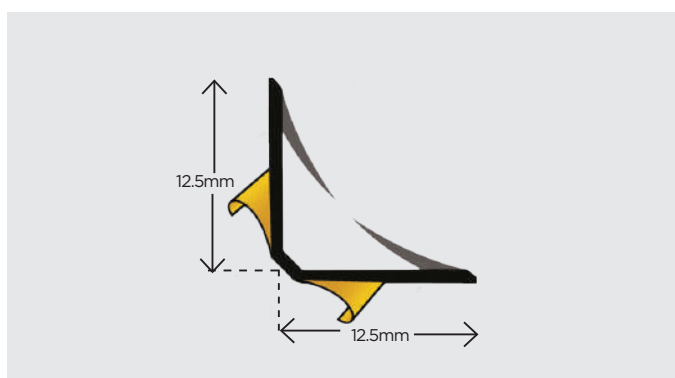

### Constructor D 10mm x 12mm

Roll - 50m, self adhesive

Available in black

Ref: 1.03.0065




### Constructor D 17mm x 21mm

Roll - 50m, self adhesive

Available in black

Ref: 1.03.0066

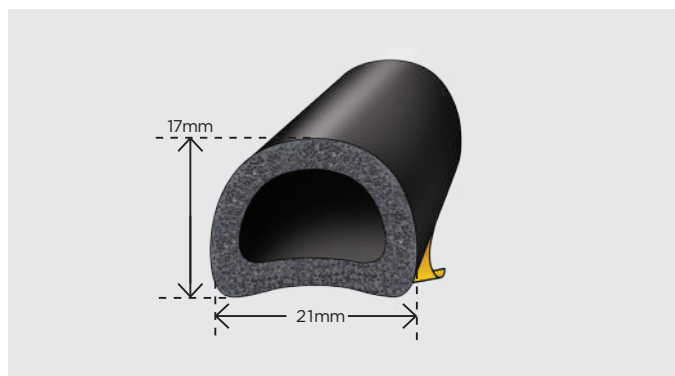

## JSIF Wiper Seal


Seals gaps 4 - 7mm

Roll - 150m/Box

Material - TPE

Available in black, brown & white

Ref: 1.10.0170

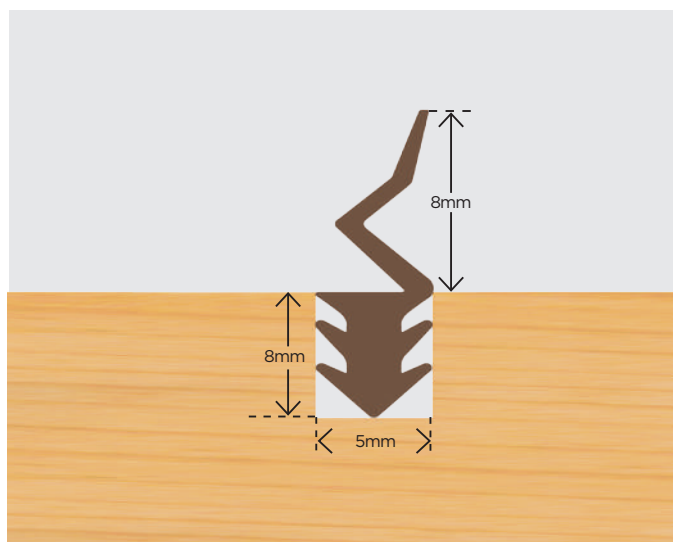

## Flipex Wiper Seal


Seals gaps 4 - 7mm

Roll - 150m/Box

Material - TPE

Available in black

Ref: 1.10.0155

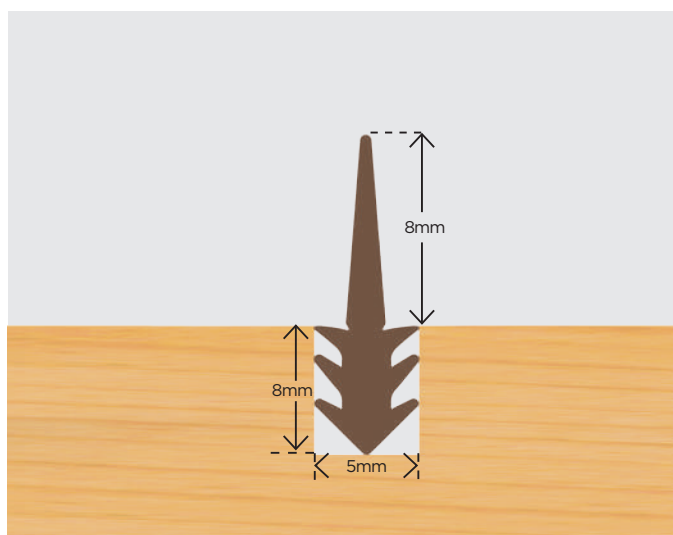

## Cabitex Joinery Seal


Seals gaps 3 - 5mm

Roll - 100m/Box

Material - PVC Nitrile

Available in brown & white

Ref: 1.10.0150

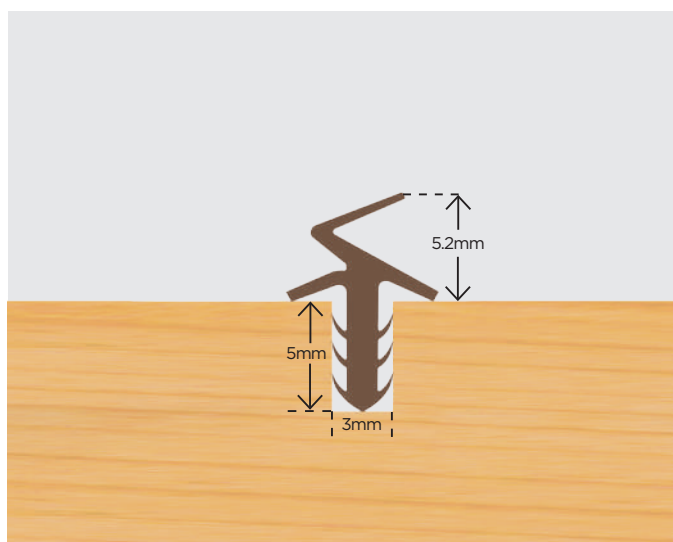

### Tubex 6mm Joinery Seal


Seals gaps 3 - 5mm

Length - 100m/Box

Material - PVC Nitrile

Available in brown & white

Ref: 1.10.0470

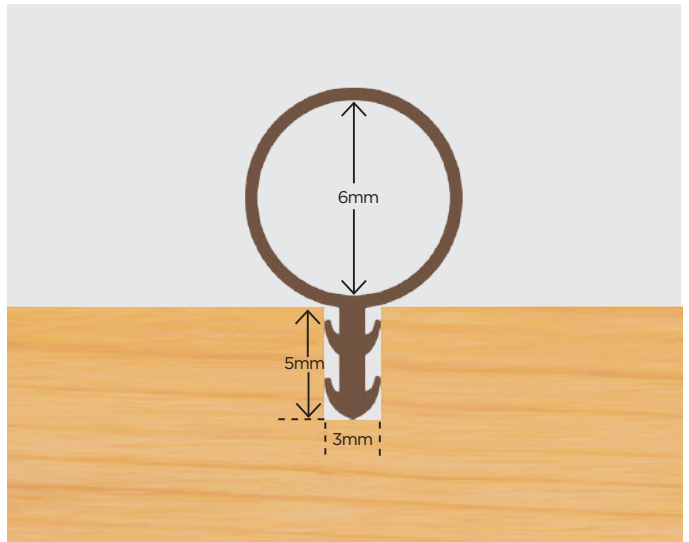

### Tubex 7.5mm Joinery Seal


Seals gaps 3 - 6.5mm

Length - 100m/Box

Material - PVC Nitrile

Available in black, white & brown

Ref: 1.10.0471

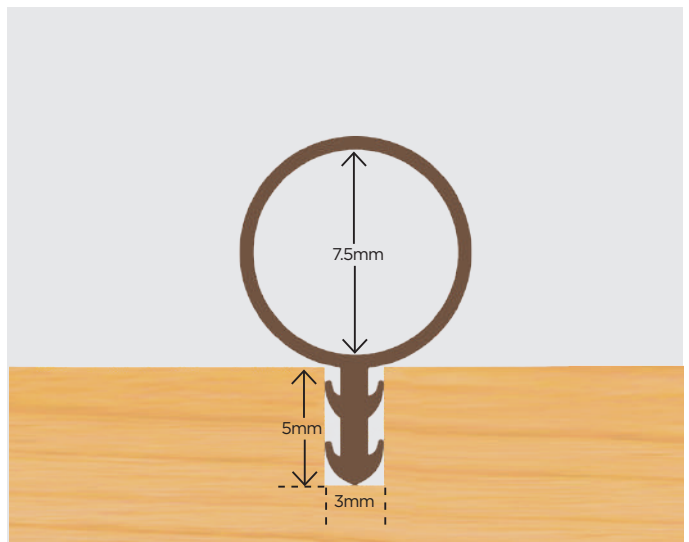

### Tubex 8mm Joinery Seal


Seals gaps 3 - 7mm

Length - 100m/Box

Material - PVC Nitrile

Available in black

Ref: 1.10.0472

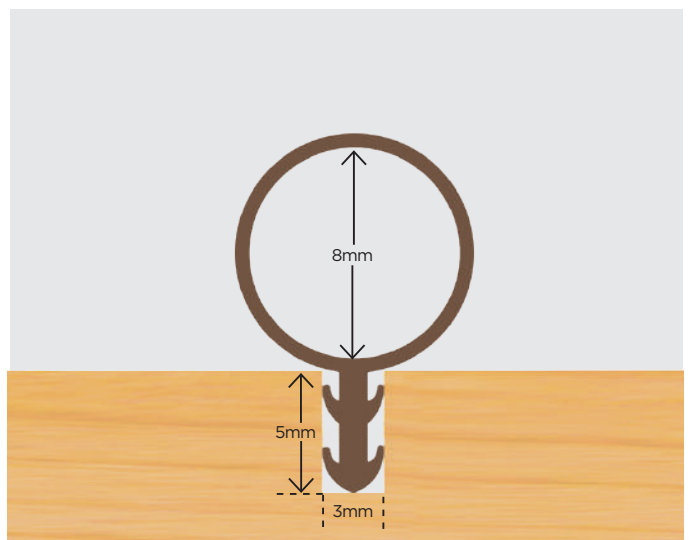



## Tubex 8.5mm Joinery Seal


Seals gaps 3 – 7.5mm

Length - 100m/Box

Material - Silicone rubber

Available in black, brown & white

Ref: 1.19.0475

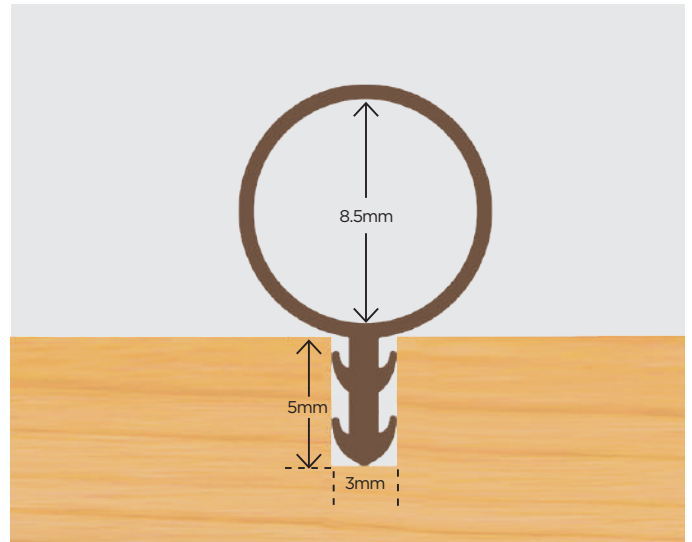

## JOSC 7mm Joinery Seal


Seals gaps 3 – 6mm

Length - 150m/Box

Material - Dual Hard TPE

Available in black

Ref: 1.10.0161

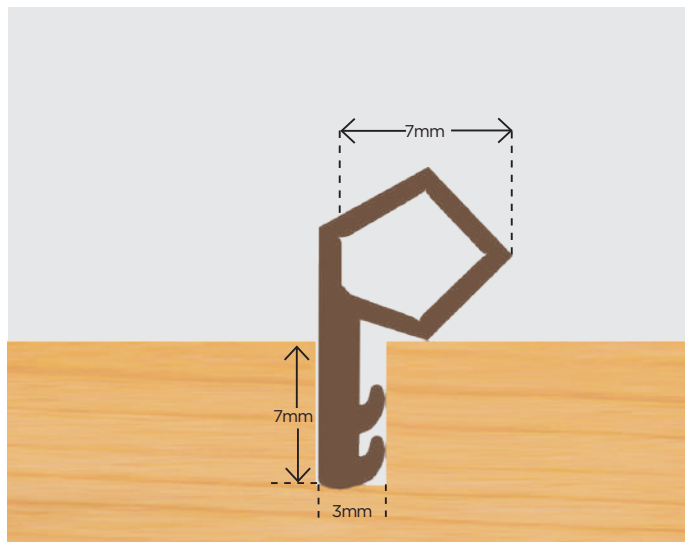

## JOSC 9mm Joinery Seal


Seals gaps 3 – 8mm

Length - 100m/Box

Material - Dual Hard TPE

Available in black, white & brown

Ref: 1.10.0160

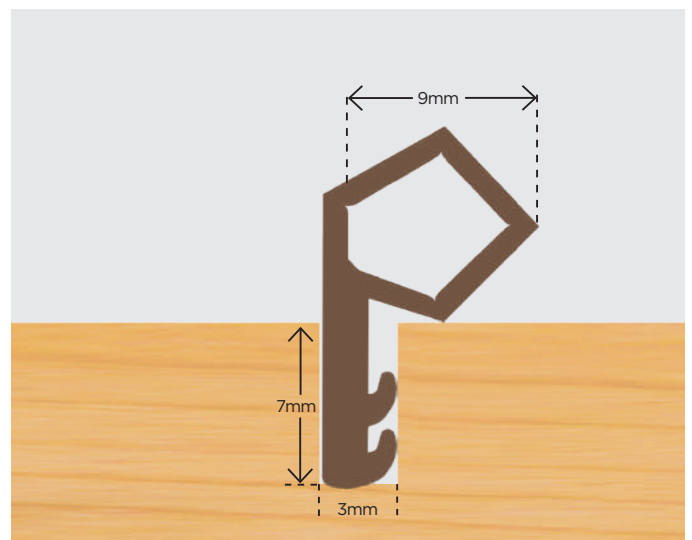

### Weldex S20


Seals gaps 5 - 8mm

Length - 150m/Box

Material -TPE

Available in black & white

Ref: 1.10.0286

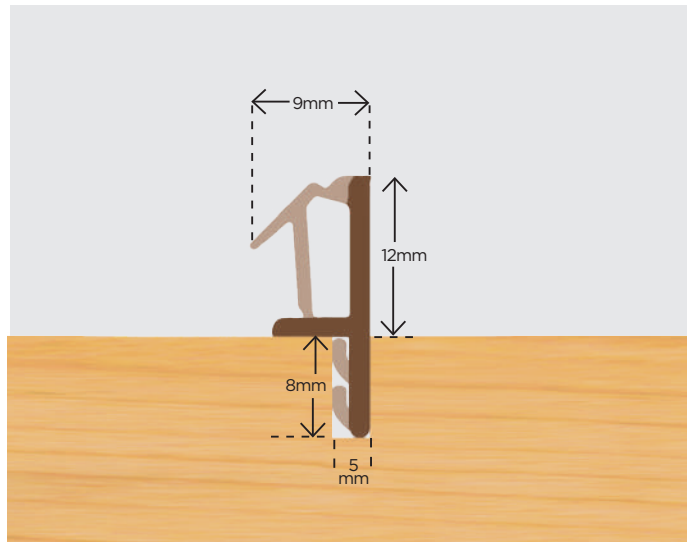

### Weldex S23


Seals gaps 5 - 8mm

Length - 150m/Box

Material -TPE

Available in black & white

Ref: 1.10.0287

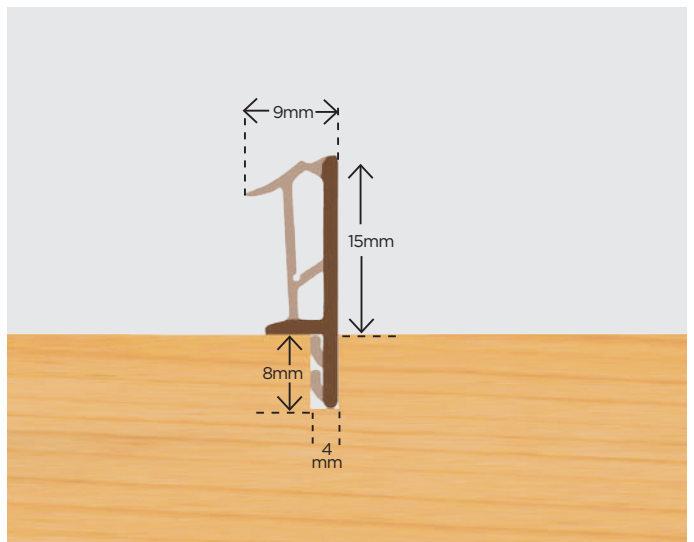

### Weldex S26


Seals gaps 5 - 8mm

Length - 150m/Box

Material -TPE

Available in black & white

Ref: 1.10.0288

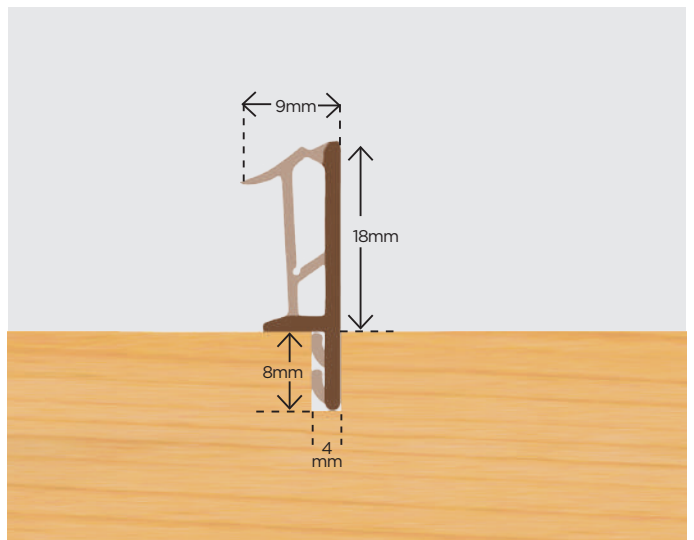

## Compex A10


Seals Gaps - 4-6mm

Box - 495m (11 x 45m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0007

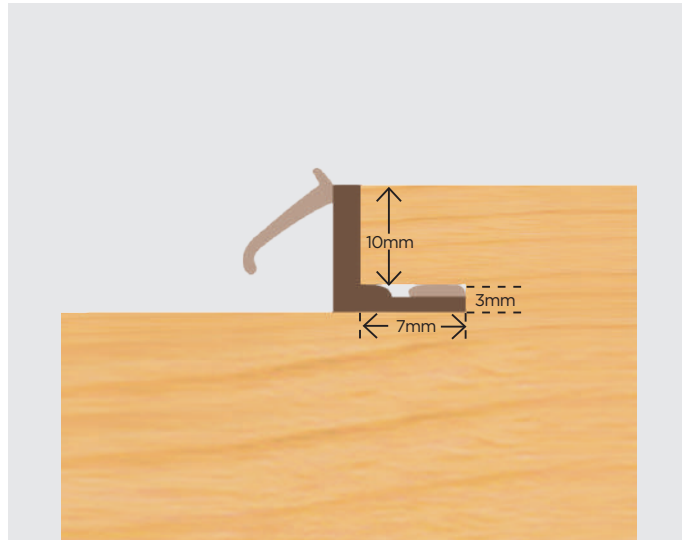

## Compex A12


Seals Gaps - 4-6mm

Box - 495m (11 x 45m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0057

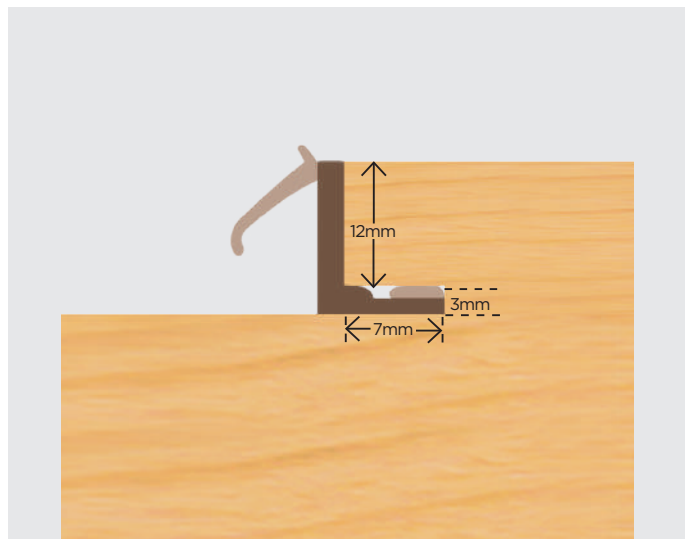

## Compex S16.5


Seals Gaps - 4-6mm

Box - 400m (8 x 50m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0010

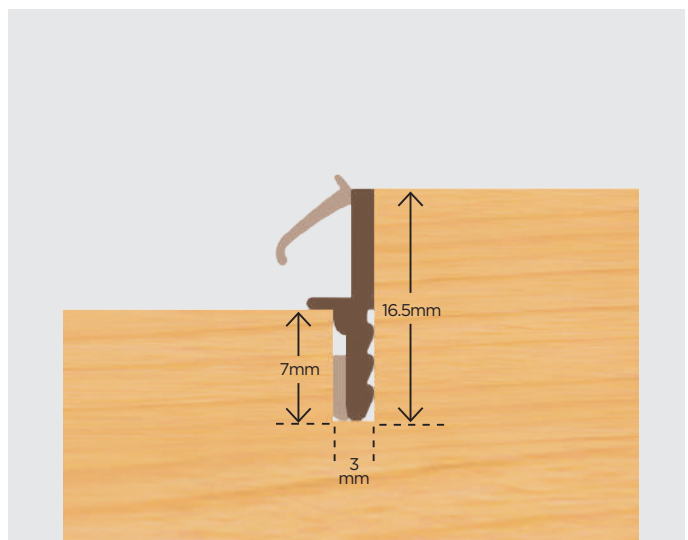

### Compex S19


Seals Gaps - 4-6mm

Box - 350m (7 x 50m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0015

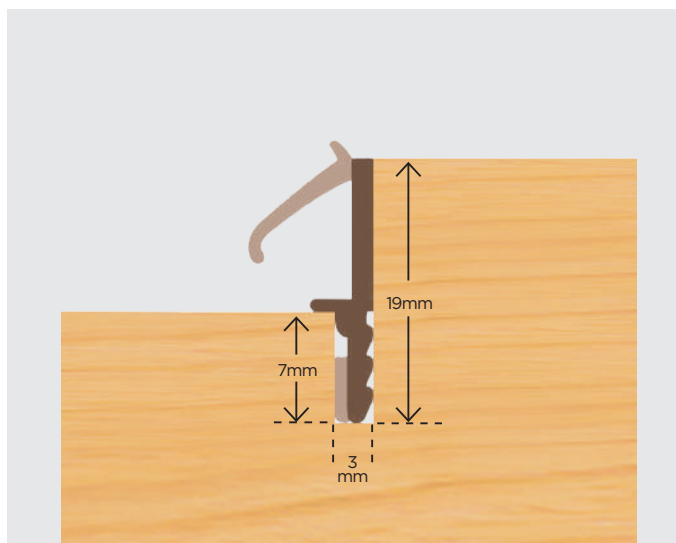

### Compex S20


Seals gaps - 4-6mm

Box - 350m (7 x 50m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0016

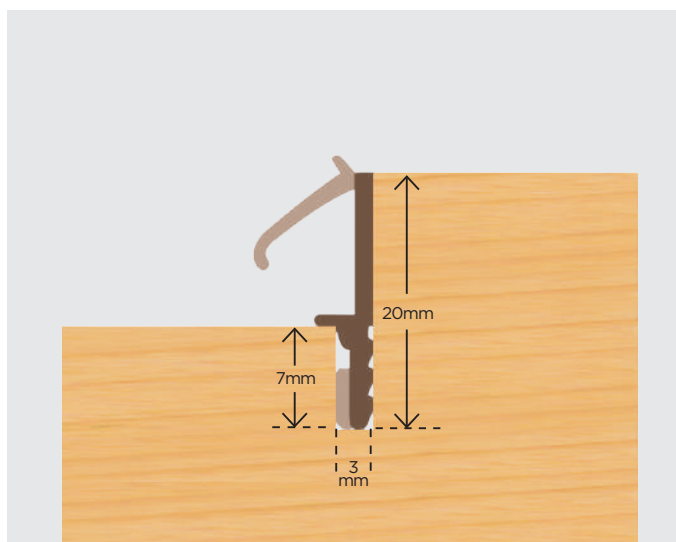

### Compex S22


Seals Gaps - 4-6mm

Box - 300m (6 x 50m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0018

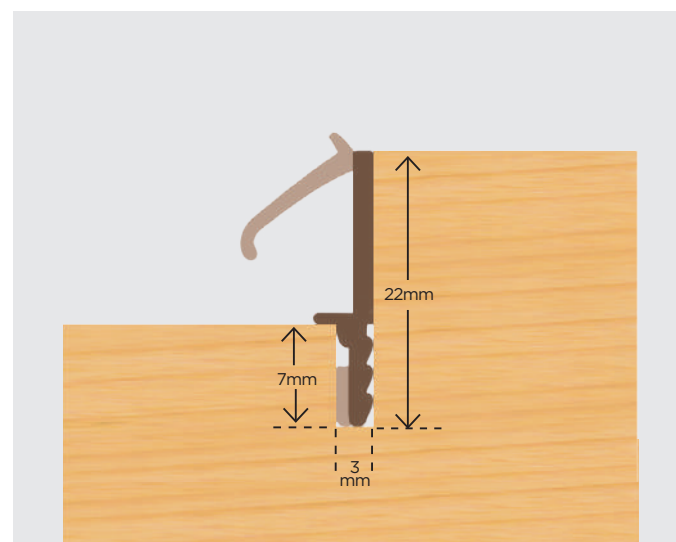

## Complex S25


Seals Gaps - 4-6mm

Box - 270m (6 x 45m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0021

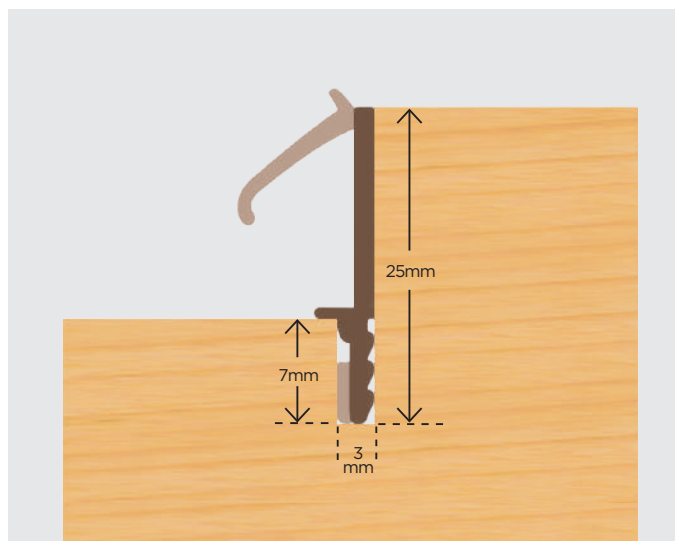


## Threshold Sealing Bar

Lengths - 914mm, 2.4m & 3m

Rigid PVC body with flexible flipper

Available in brown

Ref: 1.10.0450

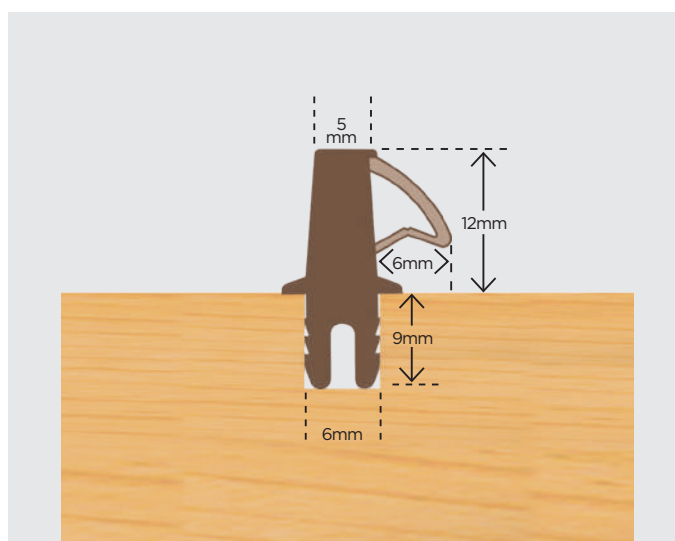


## Threshold Sealing Bar 2

Lengths - 914mm, 2.4m & 3m

Rigid PVC body with flexible flipper

Available in brown

Ref: 1.10.0452

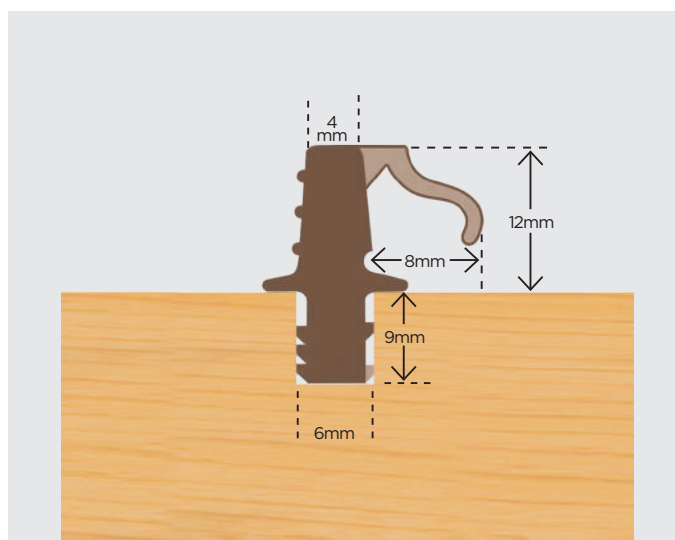

### Aluminium Glazing Beads & Accessories

**A** Tapered Wedge Packers for 14mm, 20mm, 24mm & 28mm units

**B** Aluminium Window Trim ref: PWT/17

**C** Corner Mouldings ref: PWT/17/CM


**D** Posilok patented End Cap ref: PSL/JPEC

**E** Angled or Flat drained Setting Blocks for 14mm, 20mm & 28mm units

**F** Posilok patented Aluminium Ventilated Bottom Bead

**G** Posilok combined Anchoring 'n' Setting Block

**H** Double Sided Lipped Security Glazing Tape

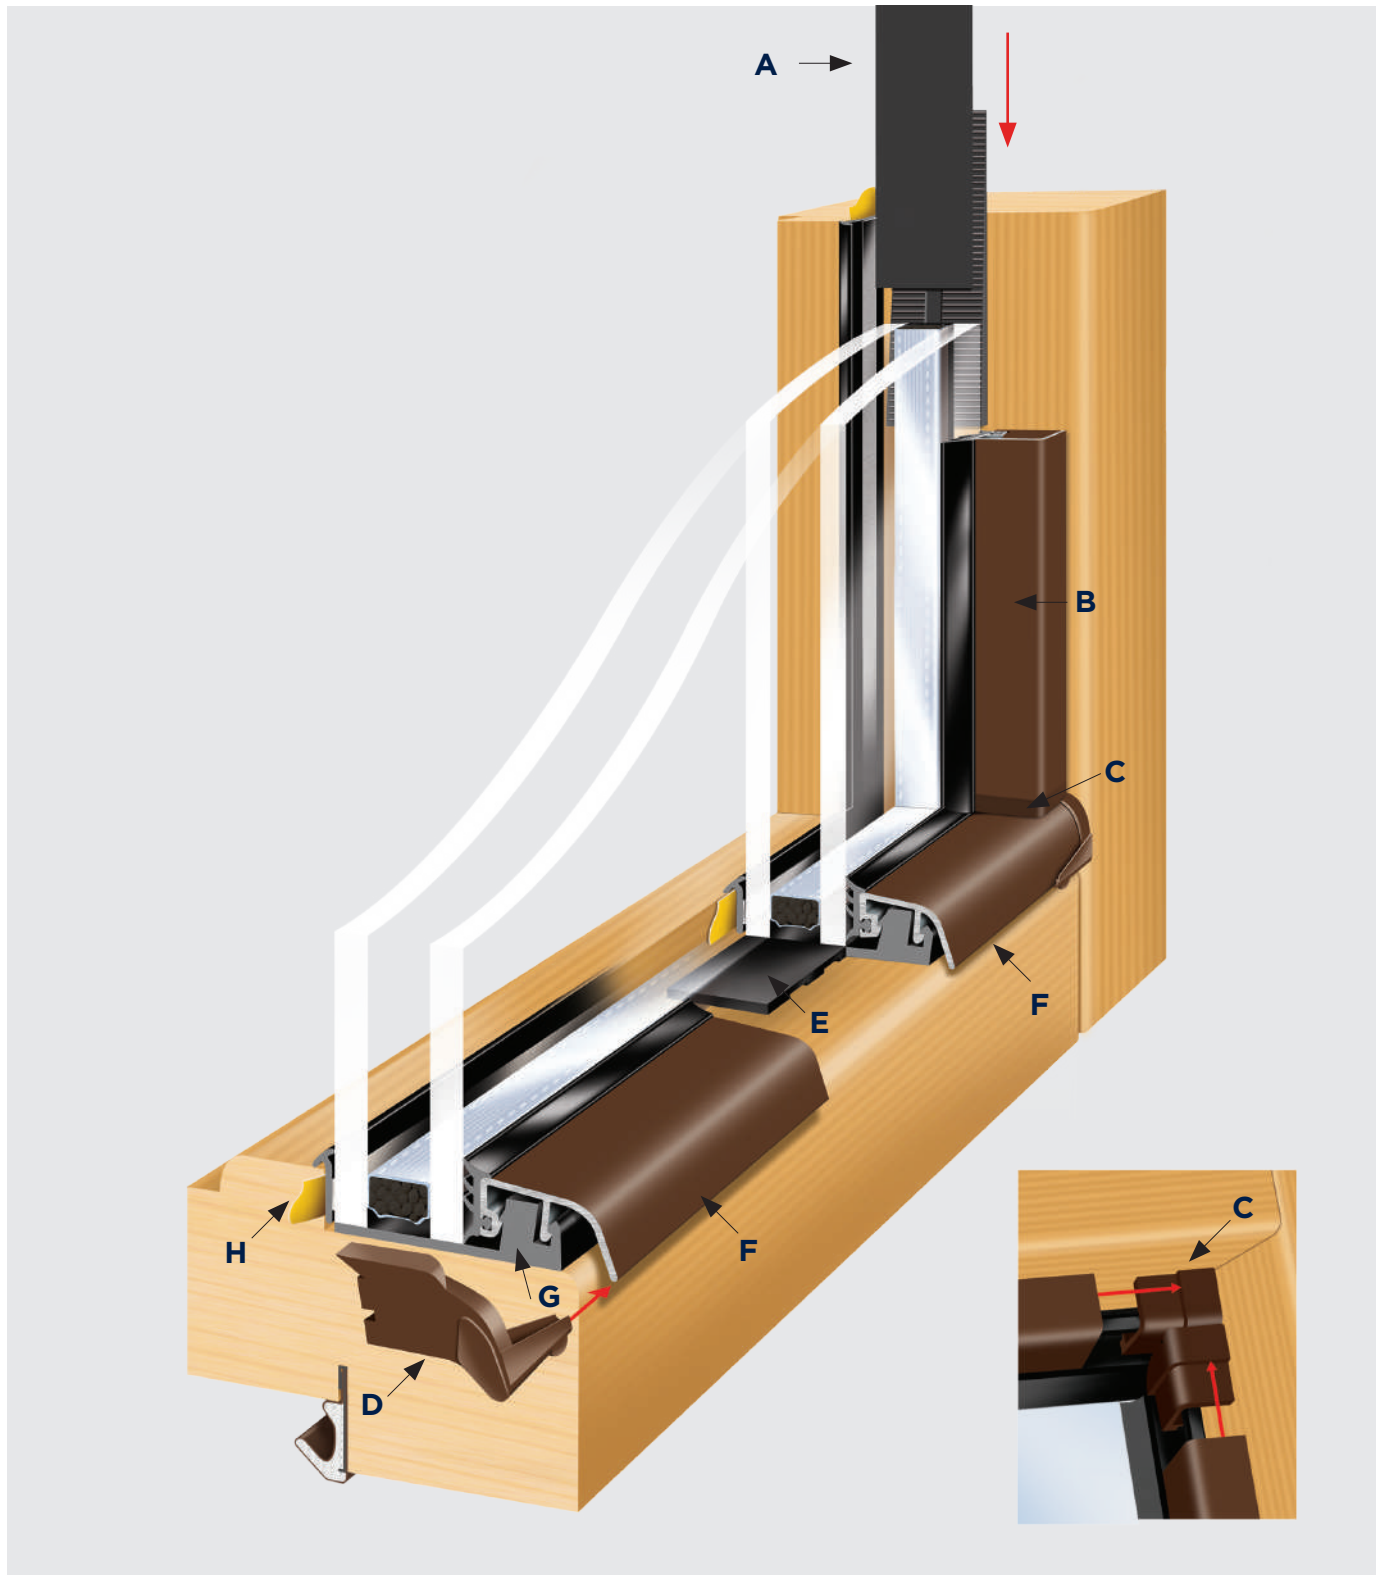


## Ventilated Aluminium Glazing Beads

### PWT 17mm Aluminium Bottom/Side Bead

Length - 3m

Available in mill, SAA, white, brown & black

Ref: 1.08.0200

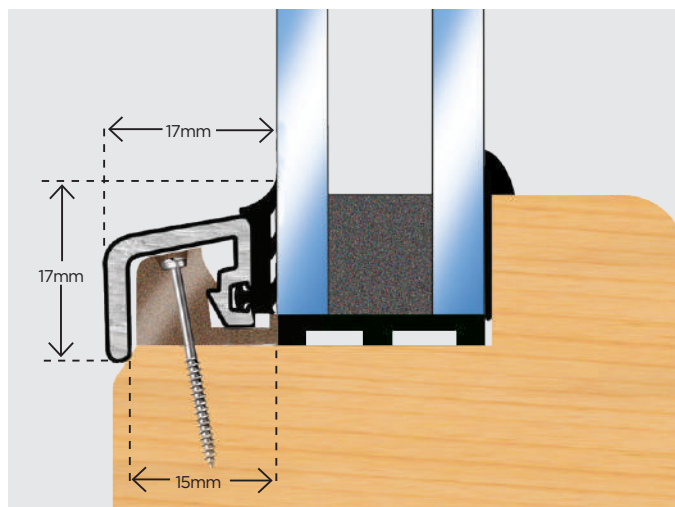

### PWT High Security Window Trim


Length - 3m

Available in mill, SAA, white, brown & black

**A** Internal Wedge Gasket

**B** Aluminium Fixing Block

Ref: 1.08.0300

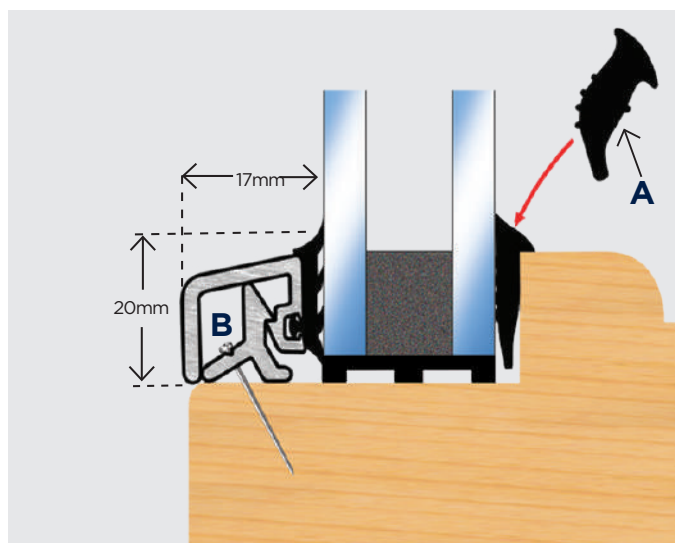


### Posilok 24mm Ventilated Aluminium Bottom Bead

Length - 3m

Available in mill, SAA, white, brown, black & cream

Ref: 1.08.0024

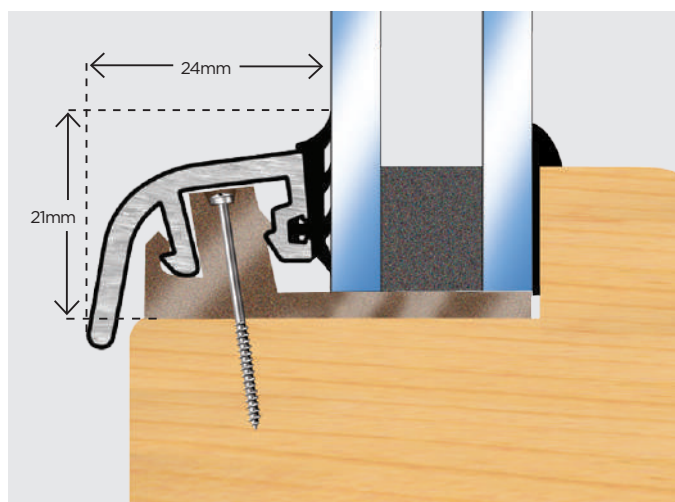




## Ventilated Aluminium Glazing Beads

### Posilok 32mm Ventilated Aluminium Bottom Bead

Length - 3m

Available in mill, SAA, white, brown, black & cream

Ref: 1.08.0032

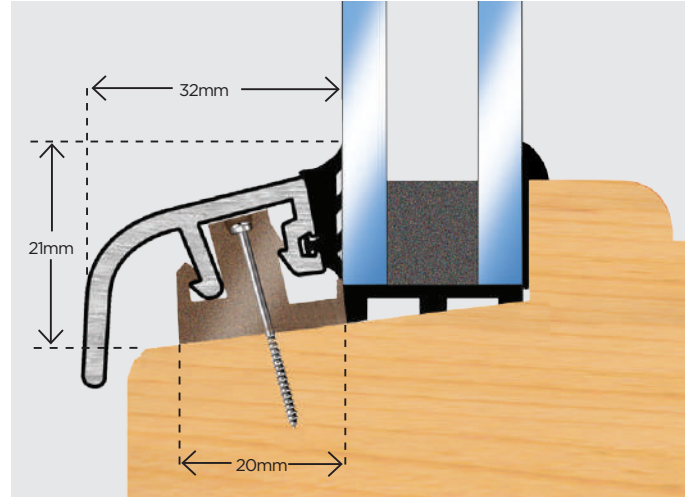


### Posilok 40mm Ventilated Aluminium Bottom Bead

Length - 3m

Available in mill, SAA, white, brown & black

Ref: 1.08.0040

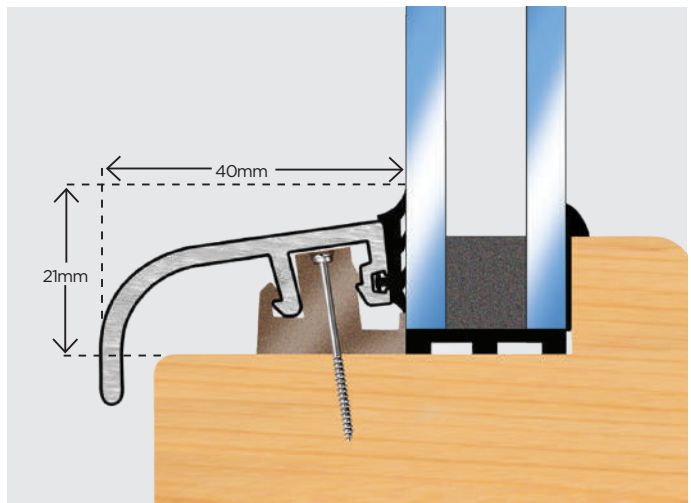


### Posilok 53mm Ventilated Aluminium Bottom Bead

Length - 3m

Available in mill, SAA, white, brown & black

Ref: 1.08.0053

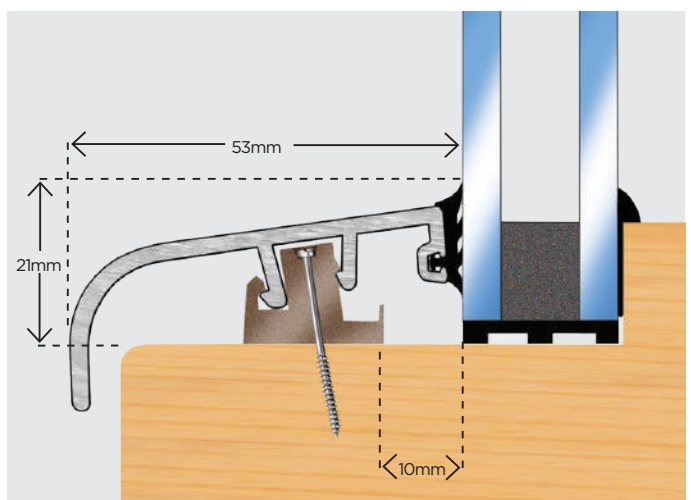

## Self Adhesive EPDM Dry Glaze Profiles



Profile	Width x Height	Reel	Colours
M 2 x 8mm	2mm x 8mm	200m	black /white
M 3 x 8mm	3mm x 8mm	150m	black
M 3 x 9mm	3mm x 9mm	150m	black/brown/white
M 3 x 12mm	3mm x 12mm	100m	black
M 3 x 15mm	3mm x 15mm	50m	black
M 4 x 8mm	4mm x 8mm	125m	grey
M 4 x 9mm	4mm x 9mm	125m	black
M 4 x 15mm	4mm x 15mm	50m	black
M 4 x 20mm	4mm x 20mm	50m	black
M 5 x 10mm	5mm x 10mm	100m	black
M 8 x 15mm	8mm x 15mm	50m	black



Ref: 1.03

Profile	Width x Height	Reel	Colours
MH 6 x 10mm	6mm x 10mm	50m	black

Ref: 1.03.0060

Profile	Width x Height	Reel	Colours
LS 3.4mm x 13.5mm	3.4mm x 13.5mm	100m	black


Ref: 1.03.0110

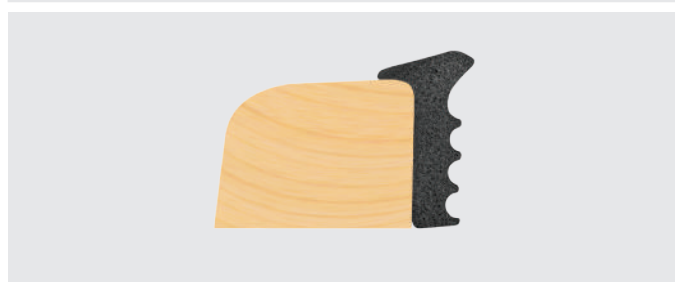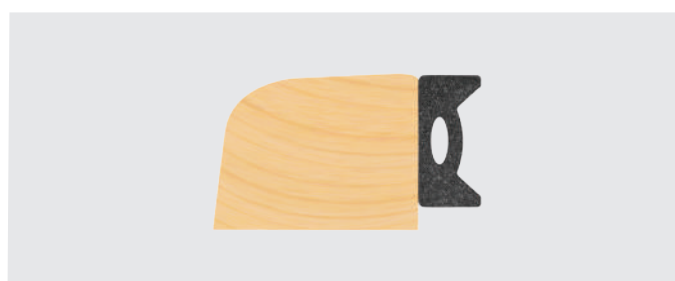

## Secret Nailing, no damage to paint coating

**A** Glazing Wedge Gasket 8x9.5mm

**B** Secret Nailing

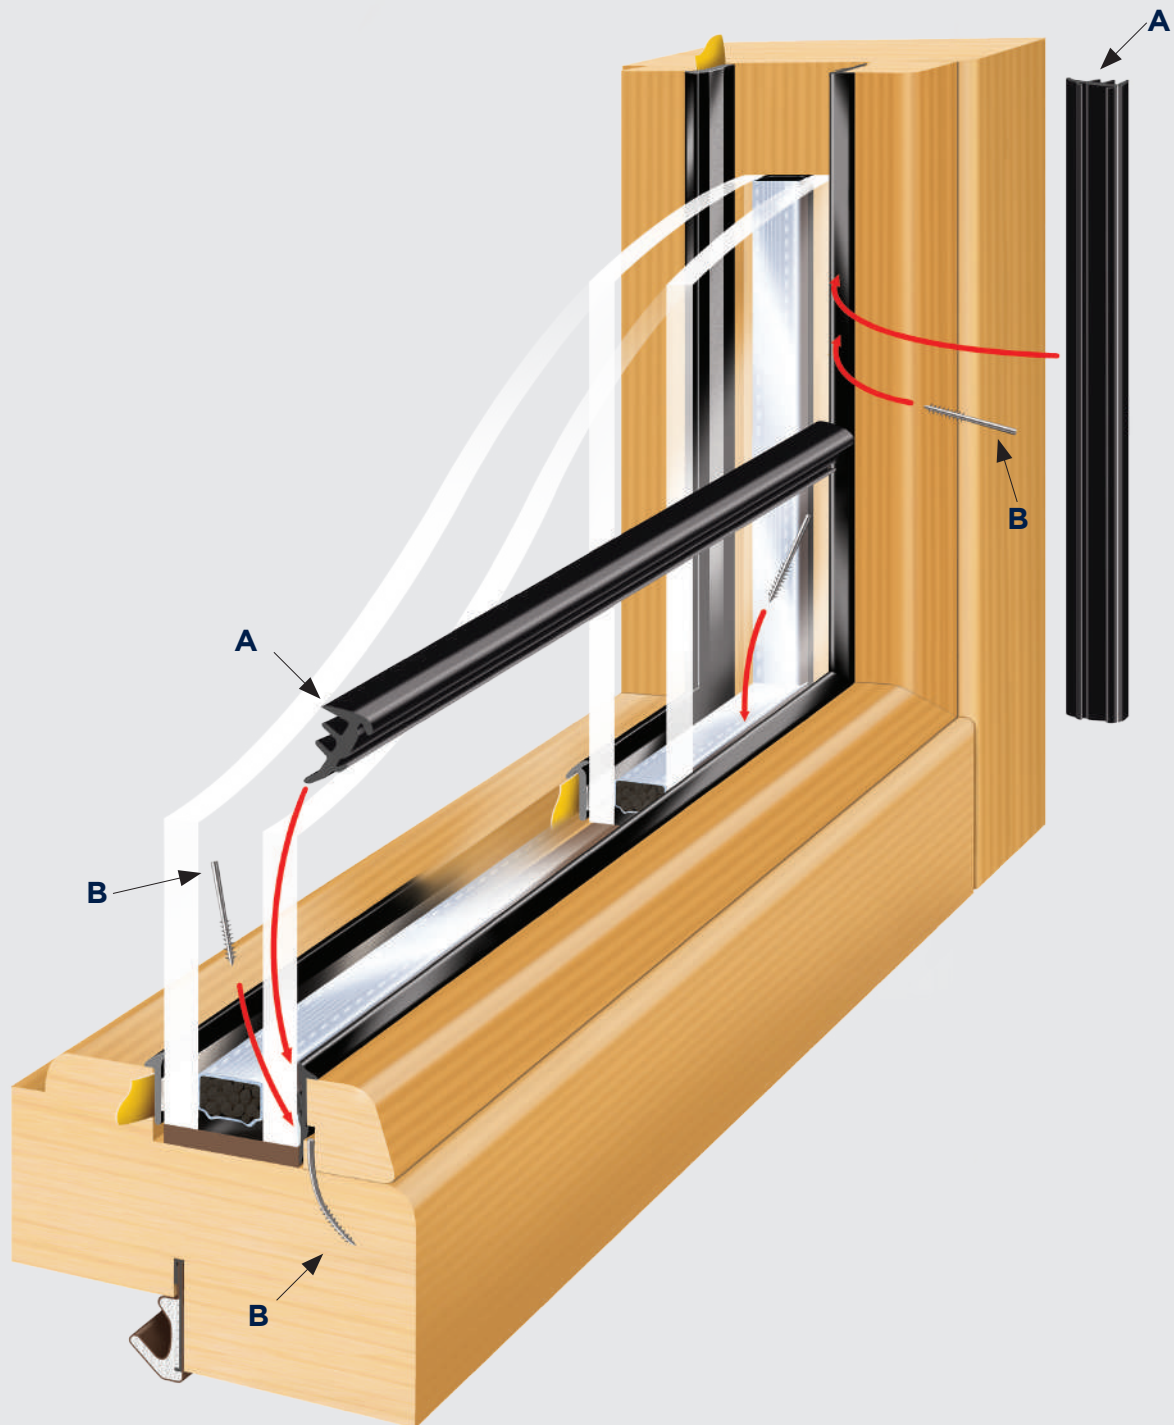

## Glazing Wedge Gasket

**A** Glazing Wedge Gasket - Dual Hard TPE

**B** Secret Nail



**C** Machined Timber Bead

Roll Size - 100m

Available in black & white

Ref: 1.10.0283

### Machining Detail

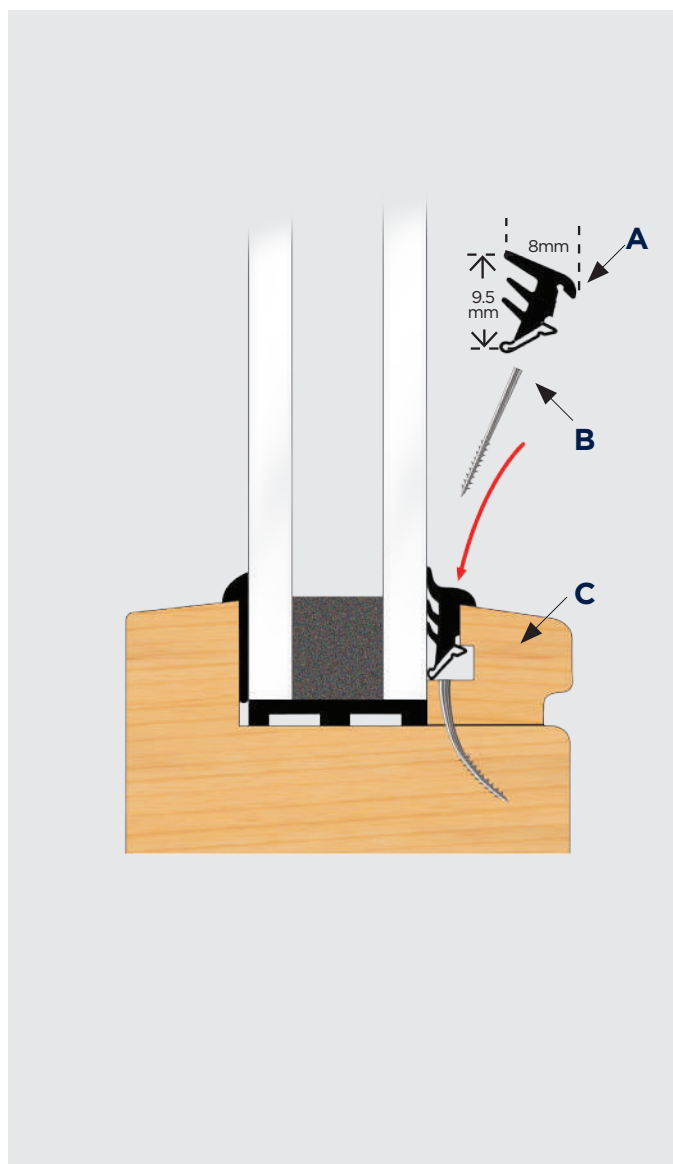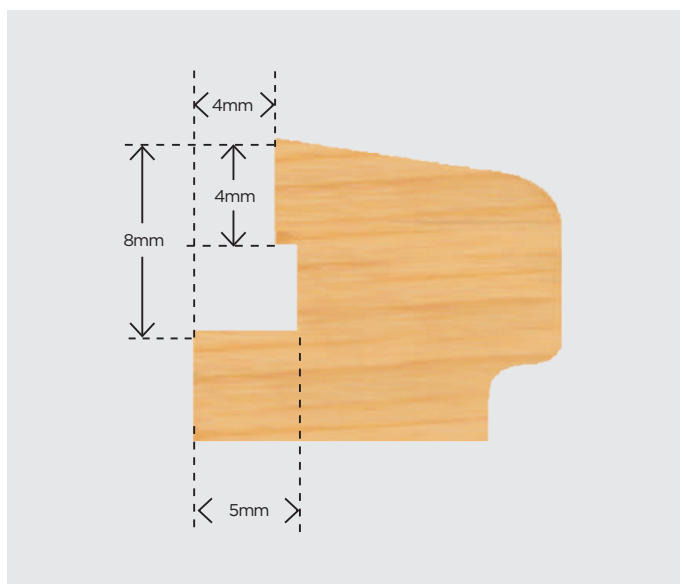


## Aluminium Sill Extension For Timber Windows

Length - 3m

Available in mill, SAA, white & brown

Ref: 1.08.0260

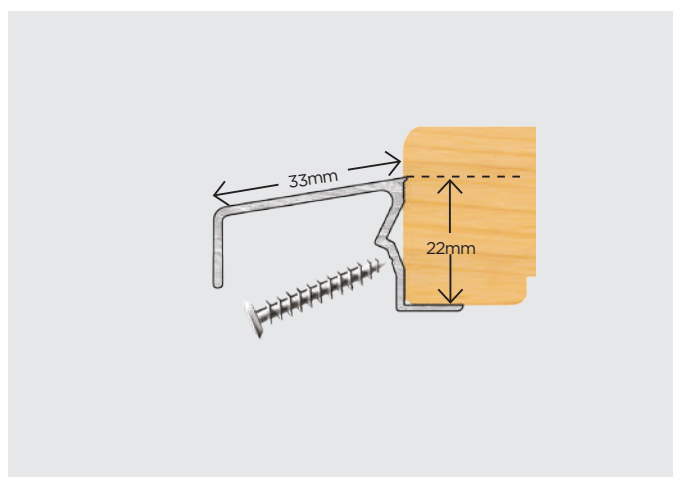

## Push Fit & Single Sided Glazing Gaskets

### Push Fit & Single Sided Glazing Gaskets




#### DGBS/AS 3 x 15mm

Roll 300m

Available in black & white (lubricated )

**Black** Ref: 1.09.0020

**White** Ref: 1.10.0121

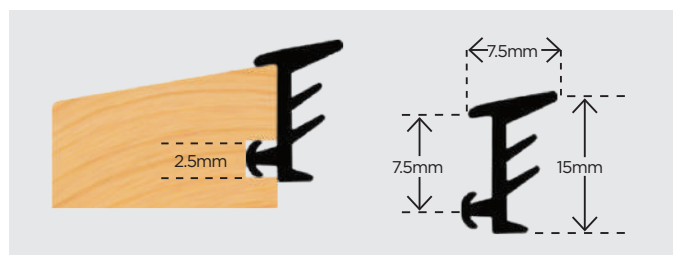


#### DGBS/RT 2 x 12mm

Roll 400m

Available in black (talc / lubricated)

Ref: 1.09.0022

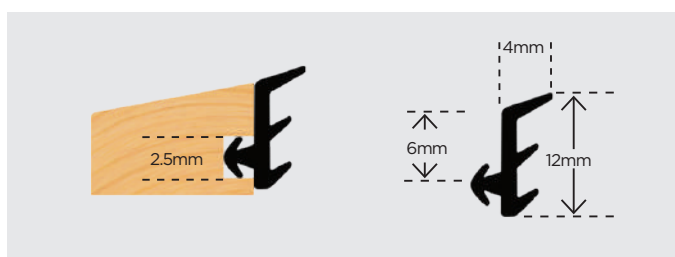

#### Single Sided Lipped Glazing Tape

Rigid spine for ease of application

Available in black & white

Ref: 1.10.0171 **SLGT 0.8 x 7.5mm x 33m**

Ref: 1.10.0172 **SLGT 0.8 x 12.8mm x 100m**



## Double Sided PVC Security Glazing Tape



### Specification

Our high security PVC glazing tape is closed cell, compressible, high density PVC coated with pressure sensitive moisture resistant solvent acrylic adhesive protected by a siliconised paper liner approved to BS 7950 (1997).

We offer a range of thicknesses & widths. The width should match the rebate/upstand height. We recommend a minimum of 10mm contact width to the frame but the greater the width the better the performance. Always ensure a clean & dry surface with the tape aligned to the top of the rebate without being stretched. Butt, or mitre corners & immediately prior to glazing remove the protective siliconised release paper. Our security PVC glazing tape is recommended to be used under 20% compression in order to maintain a water tight seal.

Thickness (mm)	1	1.5	2	3	4	5	6
----------------	---	-----	---	---	---	---	---

Roll Length (m)	50	40	33	25	20	15	15
-----------------	----	----	----	----	----	----	----

### Storage

- Store in dry conditions & apply between +10°C & +35°C
- Shelf life 1 year

## Double Sided Lipped Glazing Tape



Rigid spine for ease of application

Roll: 100m

Available in black & white

DLGT 1.8 x 12.8mm x 100m

Ref: 1.10.0173




# Double Sided Tapes

## Georgian Bar Tape

- A** Siliconised paper or filmic liner
- B** Crosslinked PE foam
- C** Pressure sensitive acrylic adhesive

Thickness (mm)	1	1.6	2
Roll Length (m)	50	46	46

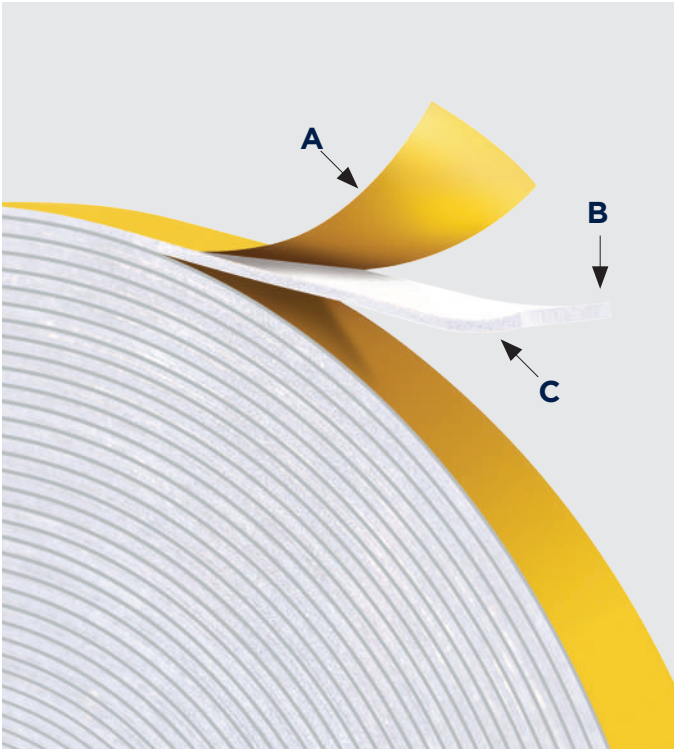

### Specification

A high tack acrylic adhesive tape offering a good balance of peel & shear performance with excellent environmental resistance. The product has been designed for both internal & external applications.

The foam is a high quality Polyolefin with a high degree of colour stability & excellent key to the adhesive surface. The thickness & density range has been chosen to offer a conformable product for uneven, irregular or contoured materials.

The acrylic adhesive has good weathering & chemical resistance properties.

Available in black & white as a double sided tape in thicknesses 1mm, 1.6mm & 2mm protected by a siliconised paper liner in a range of widths.


### Storage

- Store in dry conditions & apply between +10°C and +35°C
- Shelf life 1 year





## Clear Acrylic Bonding Tape

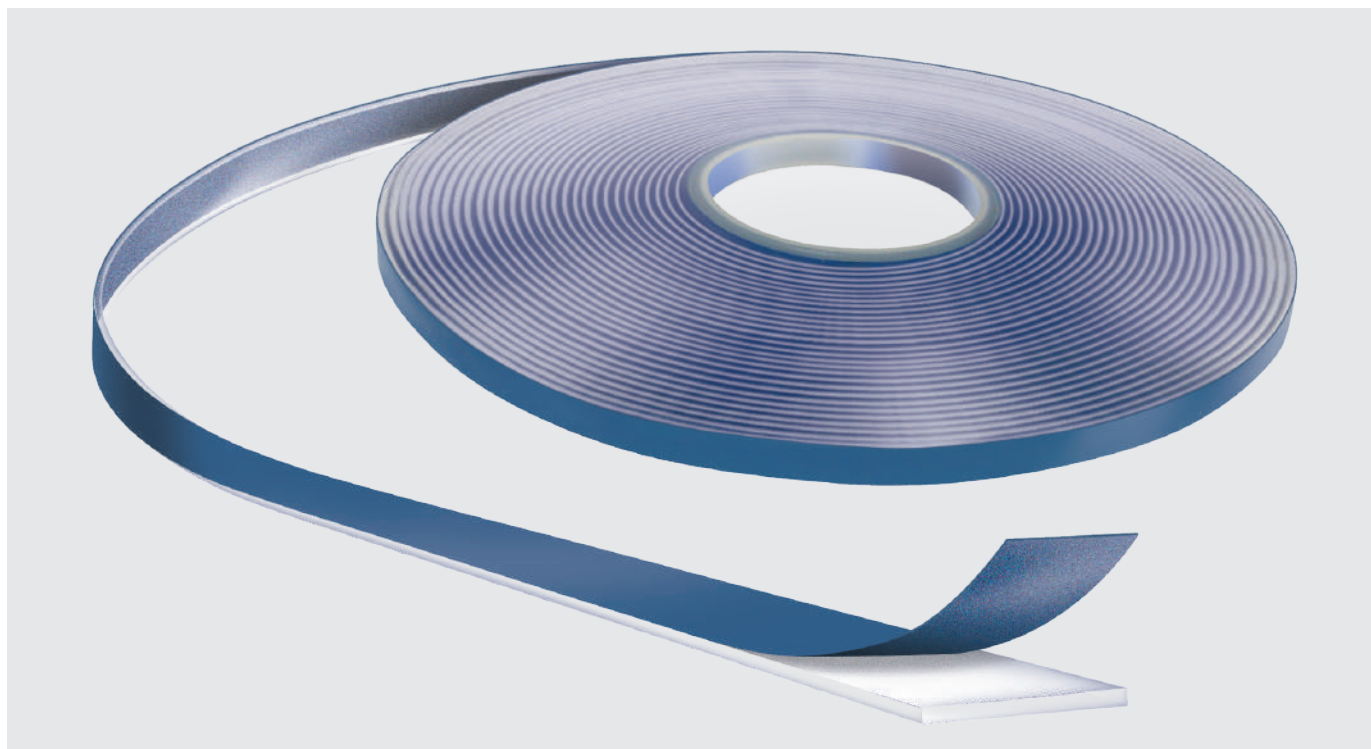

### Unique Attributes

- Easy release liner
- Clear Tape
- Very high bond strength
- Solid acrylic core
- Good quick stick
- Distributes shock

Thickness (mm)	1	1.5	2	3
Roll length (m)	33	33	25	12

### Typical Applications

- Security Glass Lamination
- Window and door decoration bars

### Specification

Exitex acrylic bonding tape is a clear solid acrylic tape that is virtually invisible after application. Available in 1mm, 1.5mm, 2mm & 3mm thicknesses in a range of widths.

Designed with a solid acrylic core once adhered it will increase in bond strength over time & its performance will enhance with elevated temperature. Exitex acrylic tape has excellent weathering properties.

### Instructions

For maximum adhesive performance, prepare the contact surface by removing dirt, wax, soap and oily films with a cleaning solvent. A typical cleaning solvent is a 50 / 50 isopropyl alcohol / water mixture. It may be necessary to seal and/or prime the contact surface.


The greater the adhesive-to-surface contact (known as wet-out), the better the adhesive bond strength. Apply the tape to the first surface with the liner on, & firmly rub down. Remove the liner just prior to bonding surfaces together and apply firm pressure to ensure full contact. Bond strength is dependent on the substrate surface, application temperature & dwell time. When possible, allow 24 hours dwell time at room temperature before loading.

## Tilt & Turn Weatherbar

**A** Tilt & Turn Weatherbar

**B** End Cap

**C** Aquatex Joinery Seal

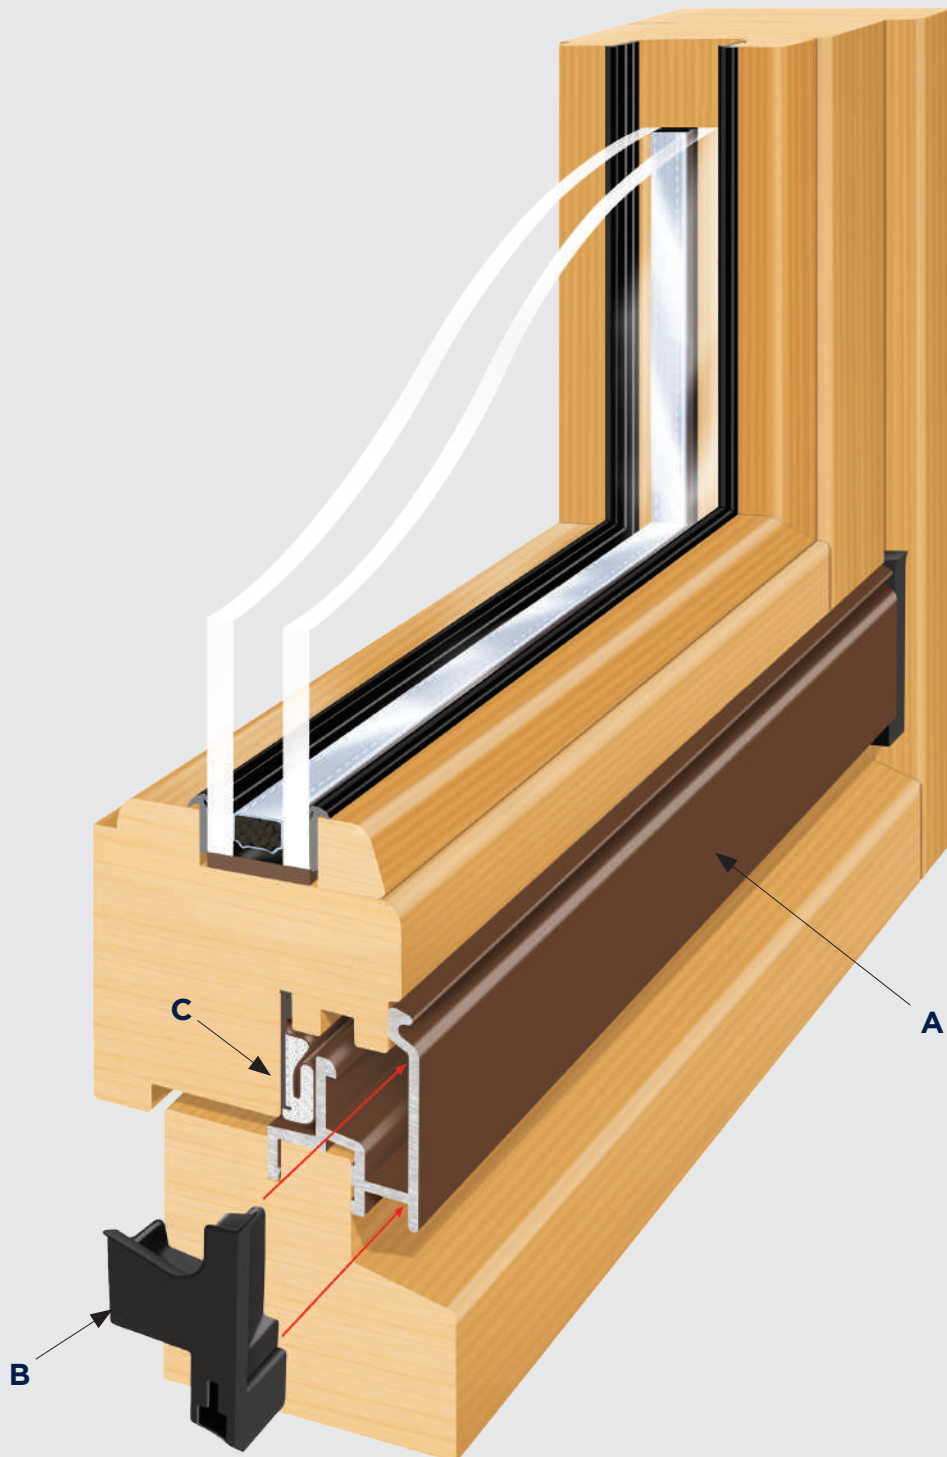


## Tilt & Turn Weatherbar - Detail 1


Length - 2m

Available in brown, white & SAA

Ref: 2.23.0792

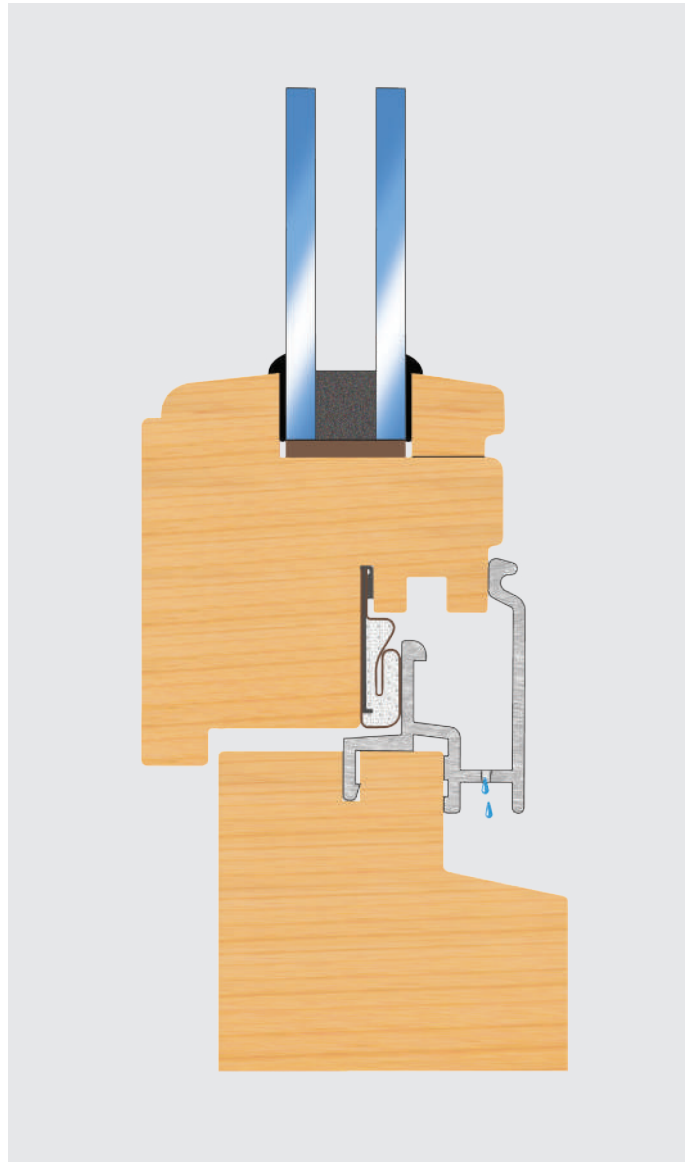


## Tilt & Turn Weatherbar - Detail 2

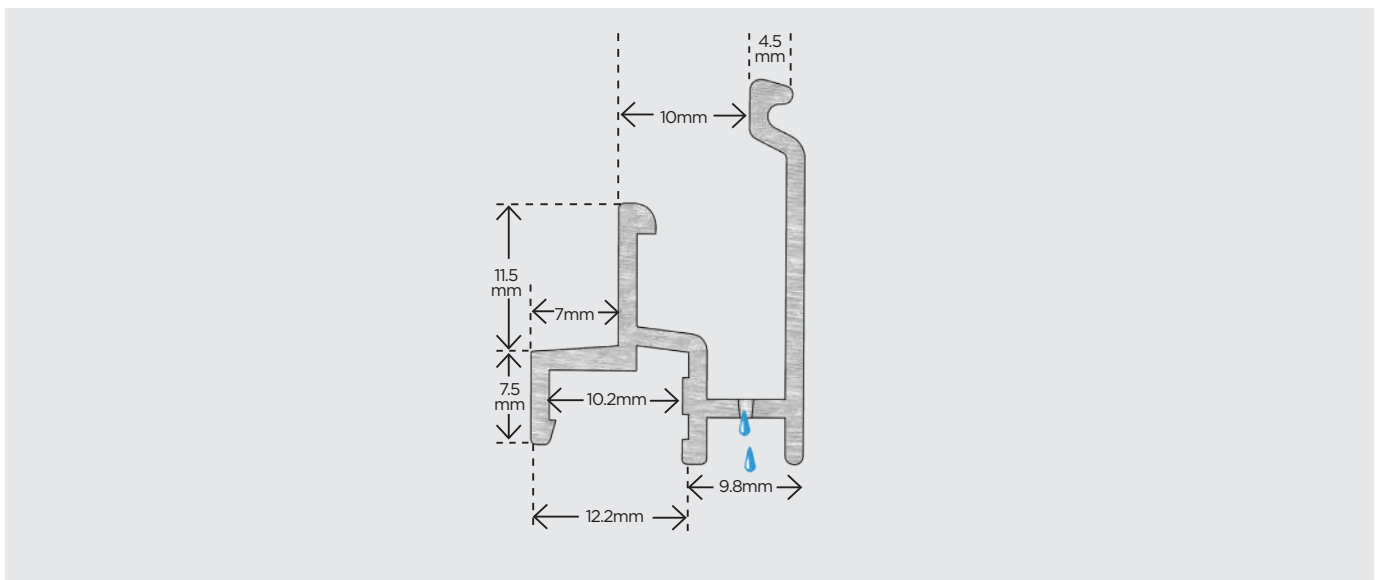

## Glazing without external fixings, no damage to paint coating


**A** Securbead

**B** Machined Timber Bead

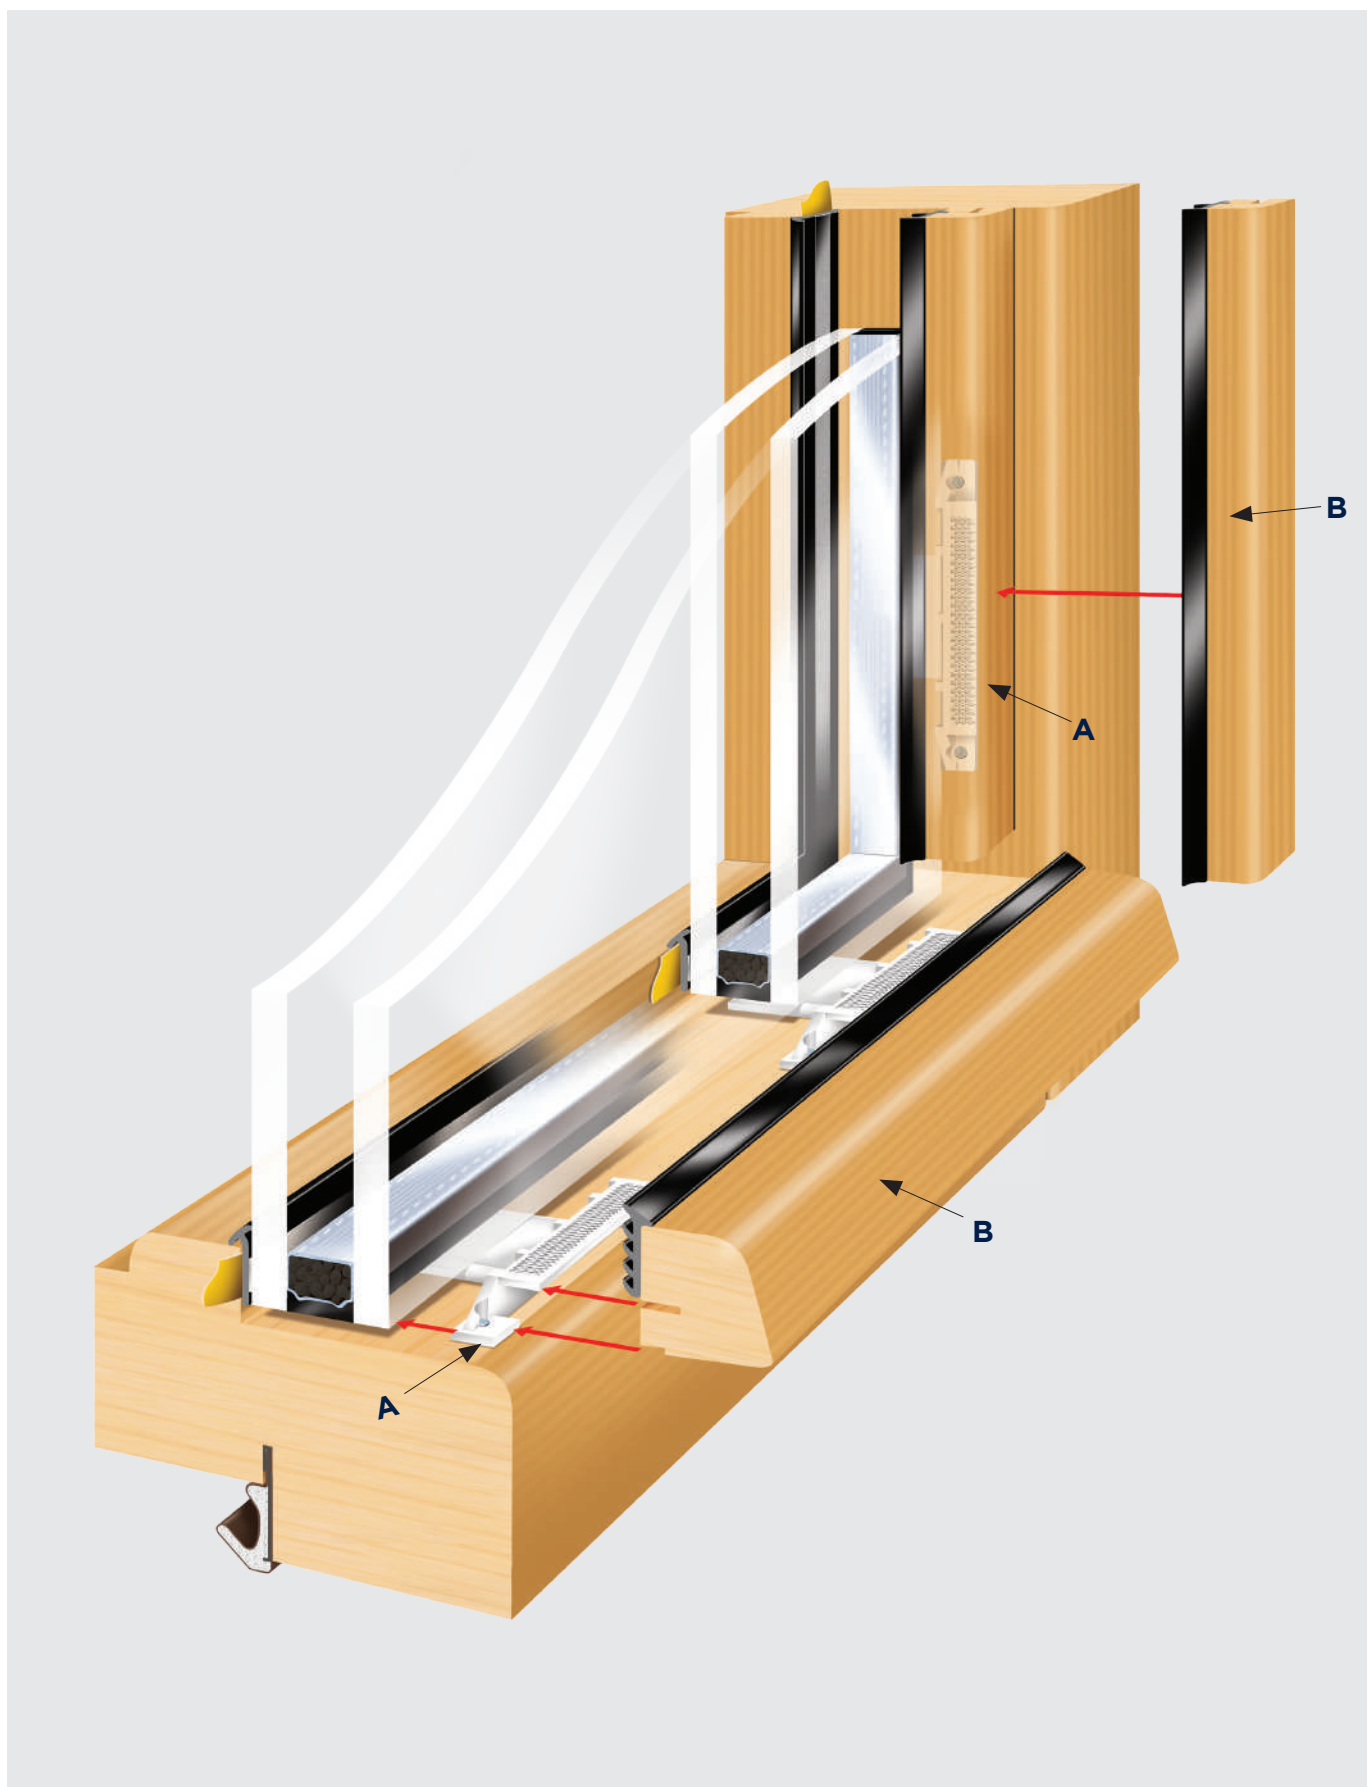


## Securbead 1mm

Ref: SCB/1mm

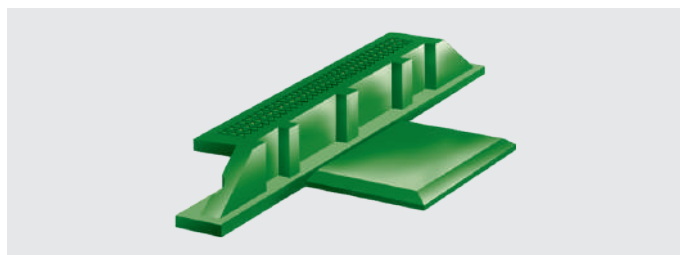


## Securbead 2mm

Ref: SCB/2mm

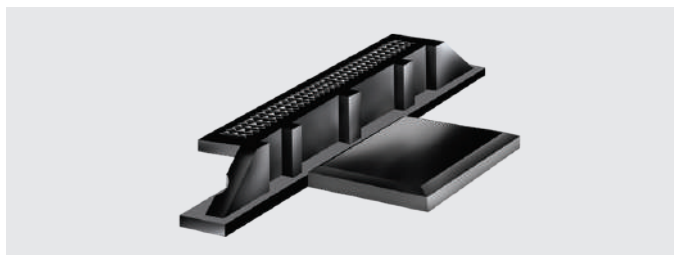


## Securbead 3mm

Ref: SCB/3mm

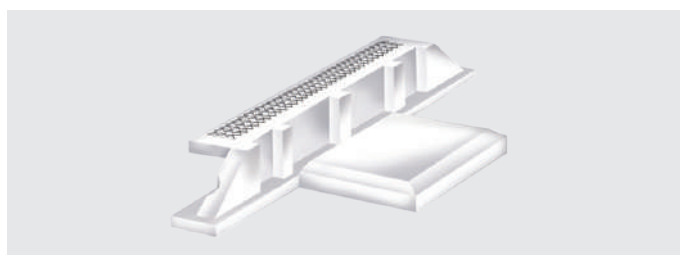


## Securbead 4mm

Ref: SCB/4mm

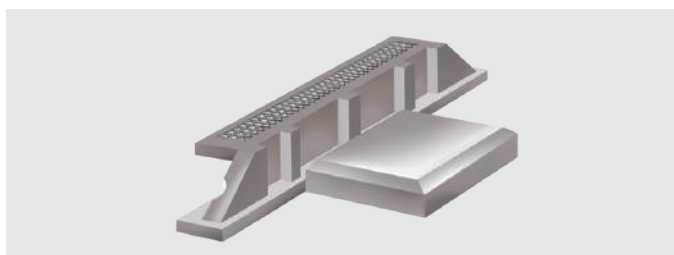


## Securbead 5mm

Ref: SCB/5mm

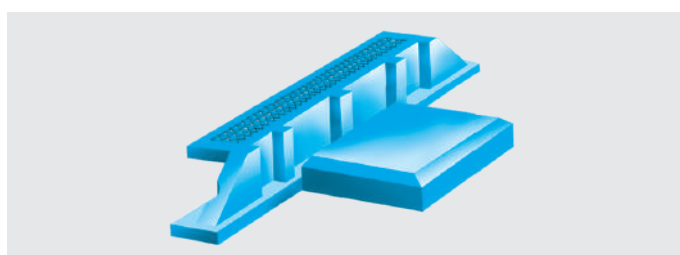


## Securbead 6mm


Ref: SCB/6mm

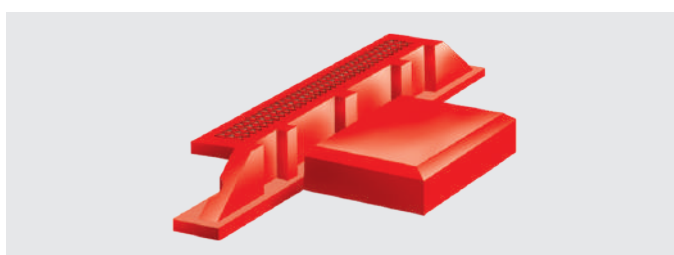

## Securbead 6mm Anchoring Groove

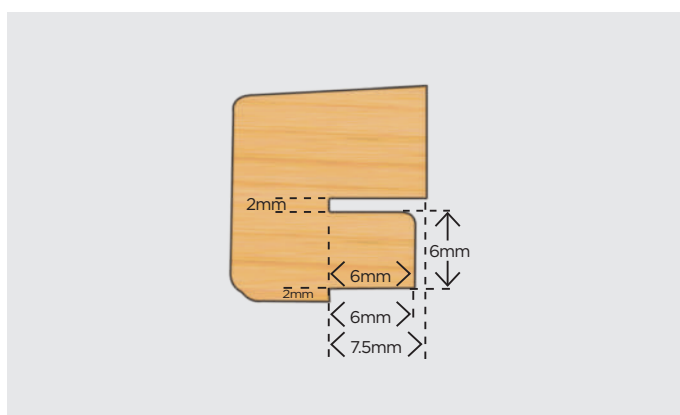

## Securbead 9mm Anchoring Groove

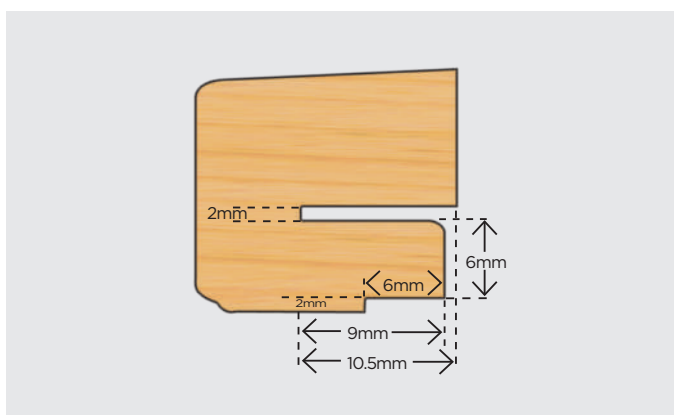

Automatically spaces the double glazed unit with a choice of 1mm to 6mm colour coded packer

Available for 14mm or 20mm double glazed units - please specify

Available with 6mm or 9mm anchoring tongue - please specify


Supplied with stainless steel staples

Optional air stapler available



Glazing without external fixings, no damage to paint coating

- A Lokbead
- B Machined Timber Bead

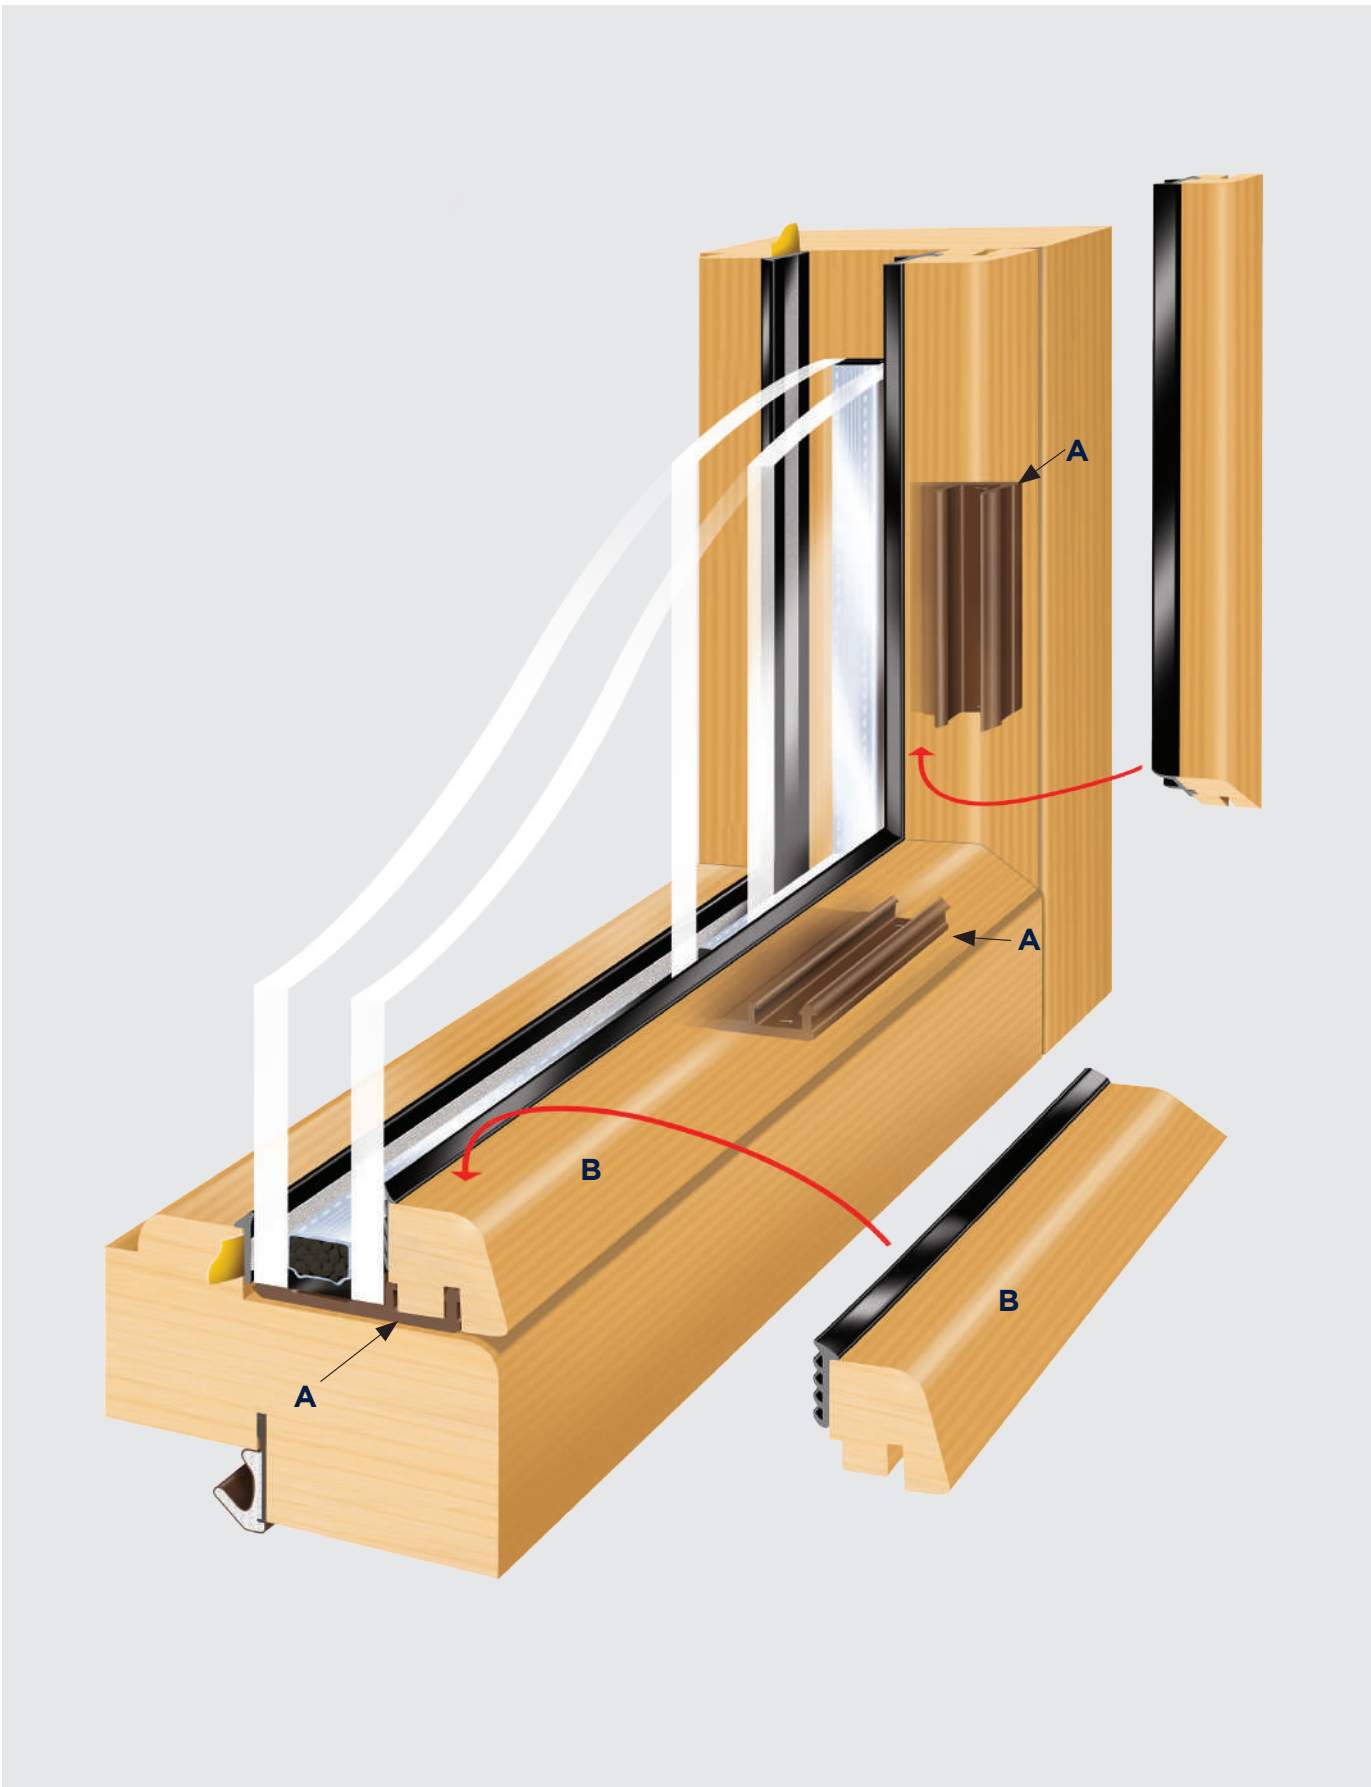

<b>A</b> Double Sided Security Glazing Tape
<b>B</b> DG units
<b>C</b> Glazing Gasket RT 2 x 12

Technical drawing of a mechanical assembly, likely a pump or valve mechanism, showing dimensions and labels A, B, and C.

**Dimensions:**

- Top horizontal distance: 20mm - 24mm
- Bottom horizontal distance: 21mm (inner), 36mm (outer)
- Right side vertical distance: 8mm
- Internal vertical distance: 5mm
- Internal horizontal distance: 9mm
- Small vertical distance: 2.5mm
- Small horizontal distance: 3mm

**Labels:**

- A:** Points to the left orange component.
- B:** Points to the two blue vertical components.
- C:** Points to the right orange component.

<b>A</b>	Double Sided Security Glazing Tape
<b>B</b>	DG units
<b>C</b>	Dry Glaze or Press Fit Glazing Gasket RT 2 x 12


[illegible]



## For Ventilated & Drained Bottom Timber Beads

**A** Timber Bead Glazing Clip

**B** Machined Timber Bottom Bead

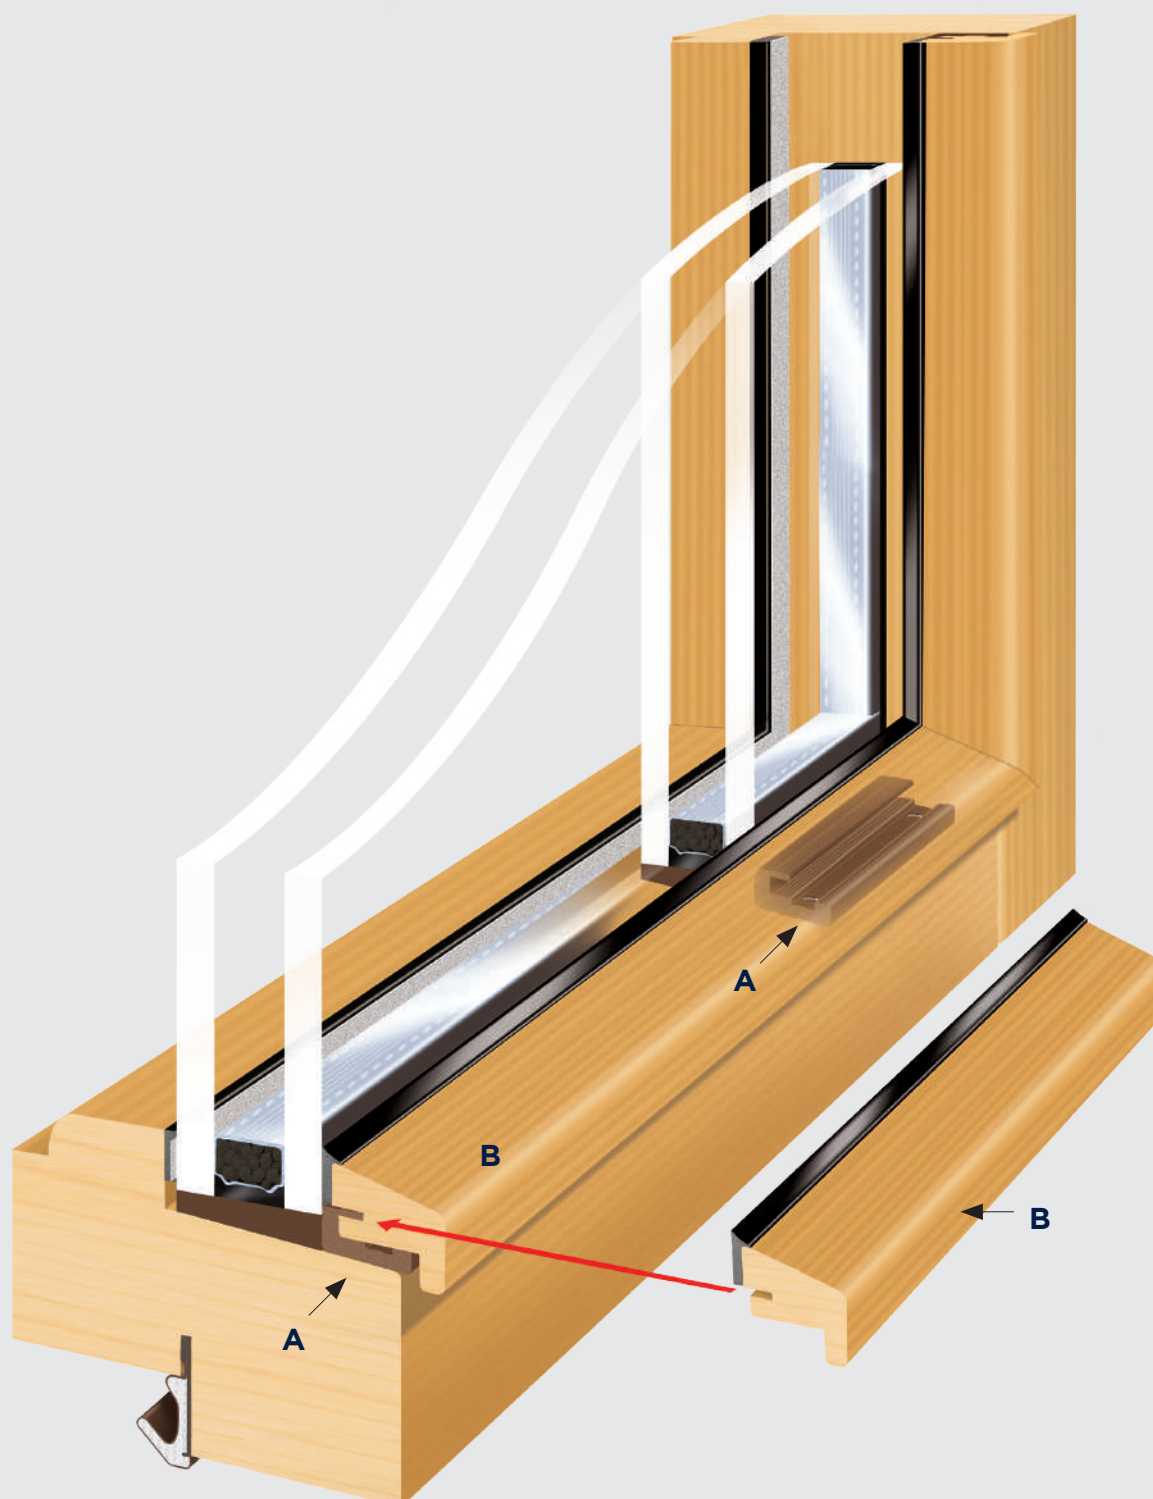


## Timber Bead Glazing Clip for Flat Rebates

**A** Timber Bead Glazing Clip

**B** Dry Glazing Gasket

**C** Security Glazing Tape

Ref: 110.0205

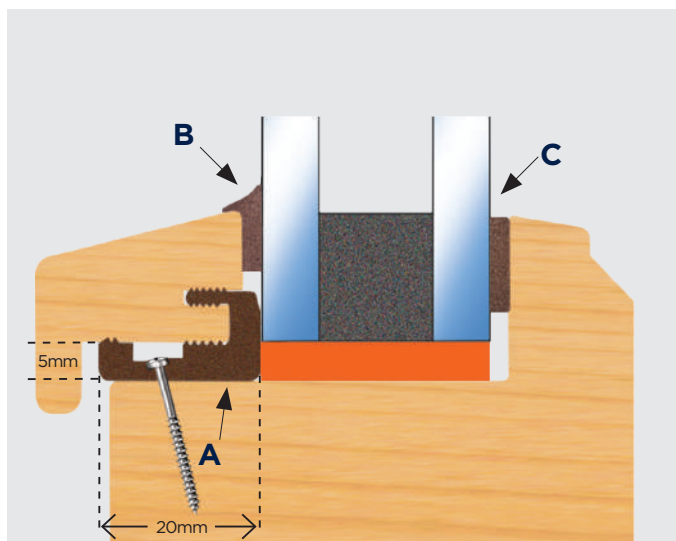


## Timber Bead Glazing Clip for Angled Rebates

**A** Timber Bead Blazing Clip


**B** Dry Glazing Gasket

**C** Security Glazing Tape

Ref: 110.0206

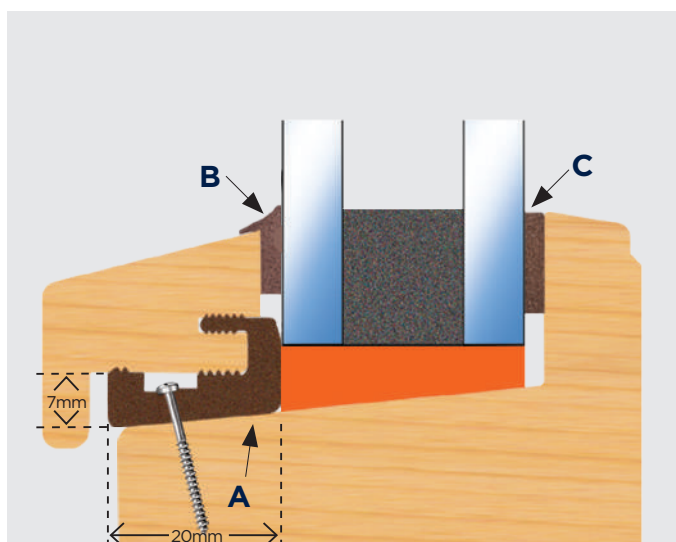


## Timber Bead Glazing Clip - Machining Detail

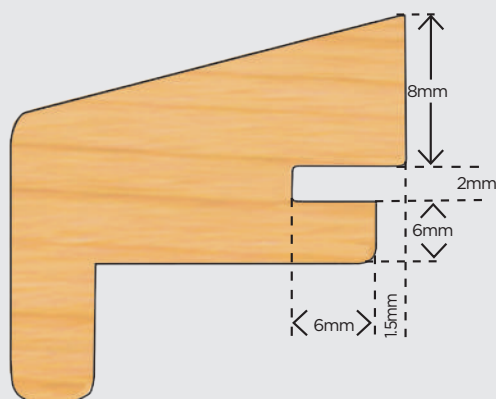

## Posilok End Caps

End Caps available for all sizes of PSL & PWT/17


Available in black, brown & white

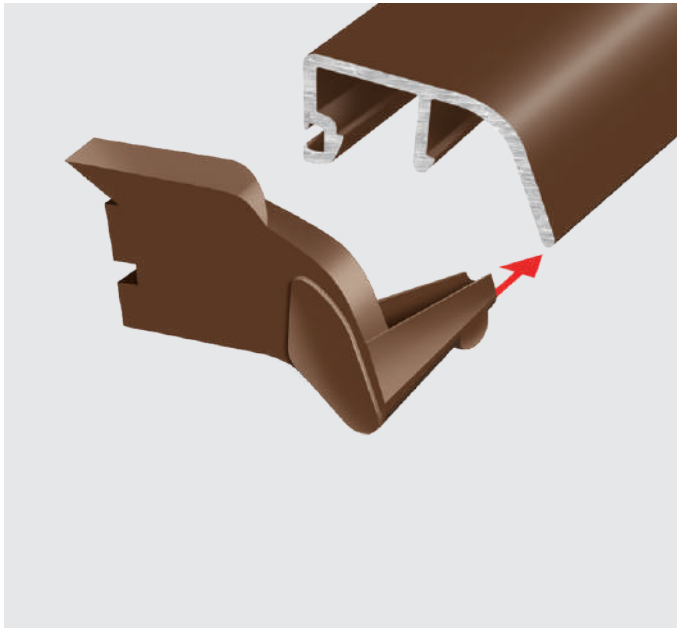

## PSL combined Flat Anchoring & Setting Blocks


Available with 3mm or 6mm platform

To suit 20, 24 & 28mm DGU's

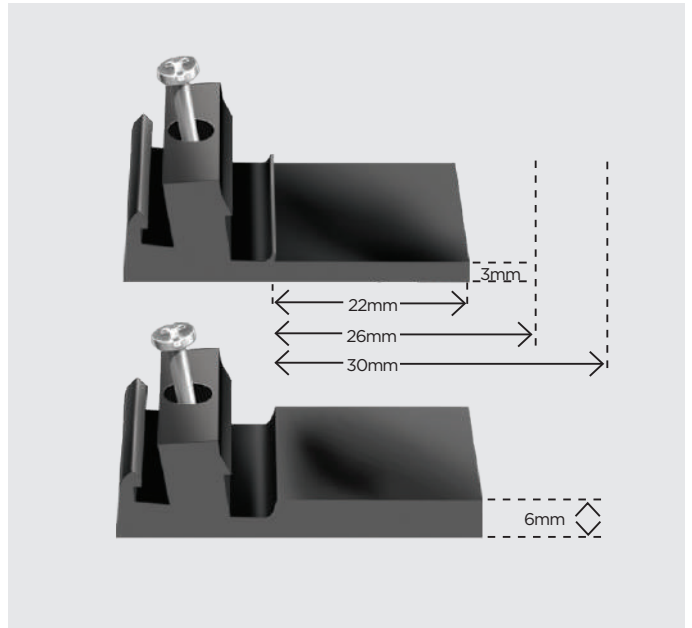

## PSL Combined Angled Anchoring & Setting Blocks

To suit 20mm, 24mm, & 28mm DGU's

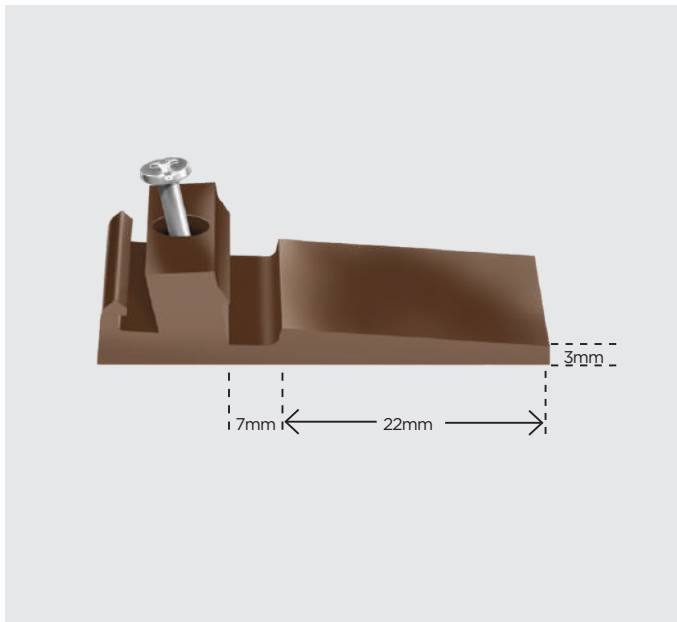


## PWT & PSL Fixing & Spacer Blocks

Allows additional clearance & drainage


**A** 3mm flat spacer for PWT

**B** 5mm flat spacer for PSL

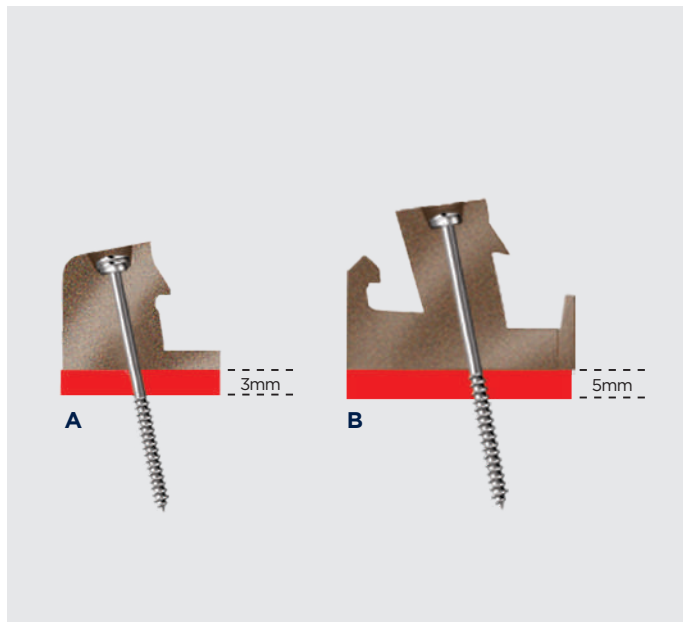


## Flat Setting Blocks

Available to suit 20 DGU's

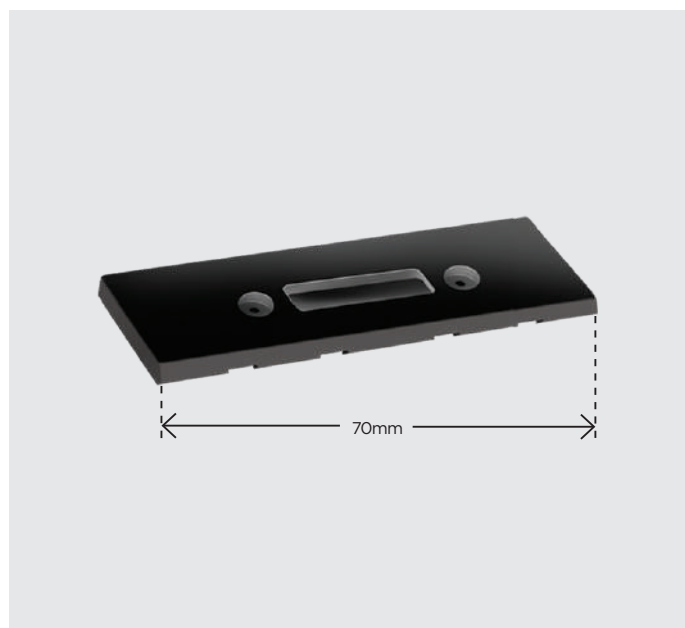

## Angled Setting Blocks

Available to suit 14, 20 & 28 DGU's

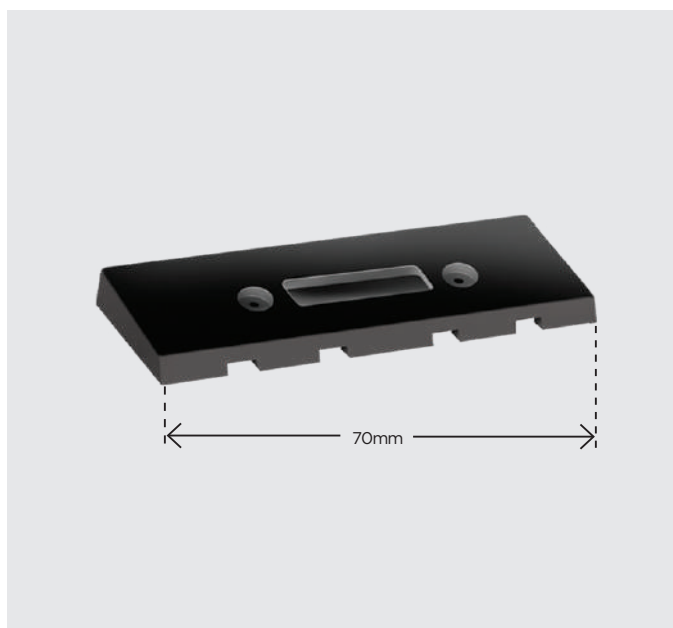

## Tapered Wedge Packers for sides & top

Available to suit 14, 20, 24 and 28 DGU's



## Elast-O-Sealant

All weather sealant


Can be applied to wet surfaces

Available in black, brown, white, grey & clear

Ref: 1.18.0400



### Intumescent Fire & Smoke Seals for Fire Door Assemblies

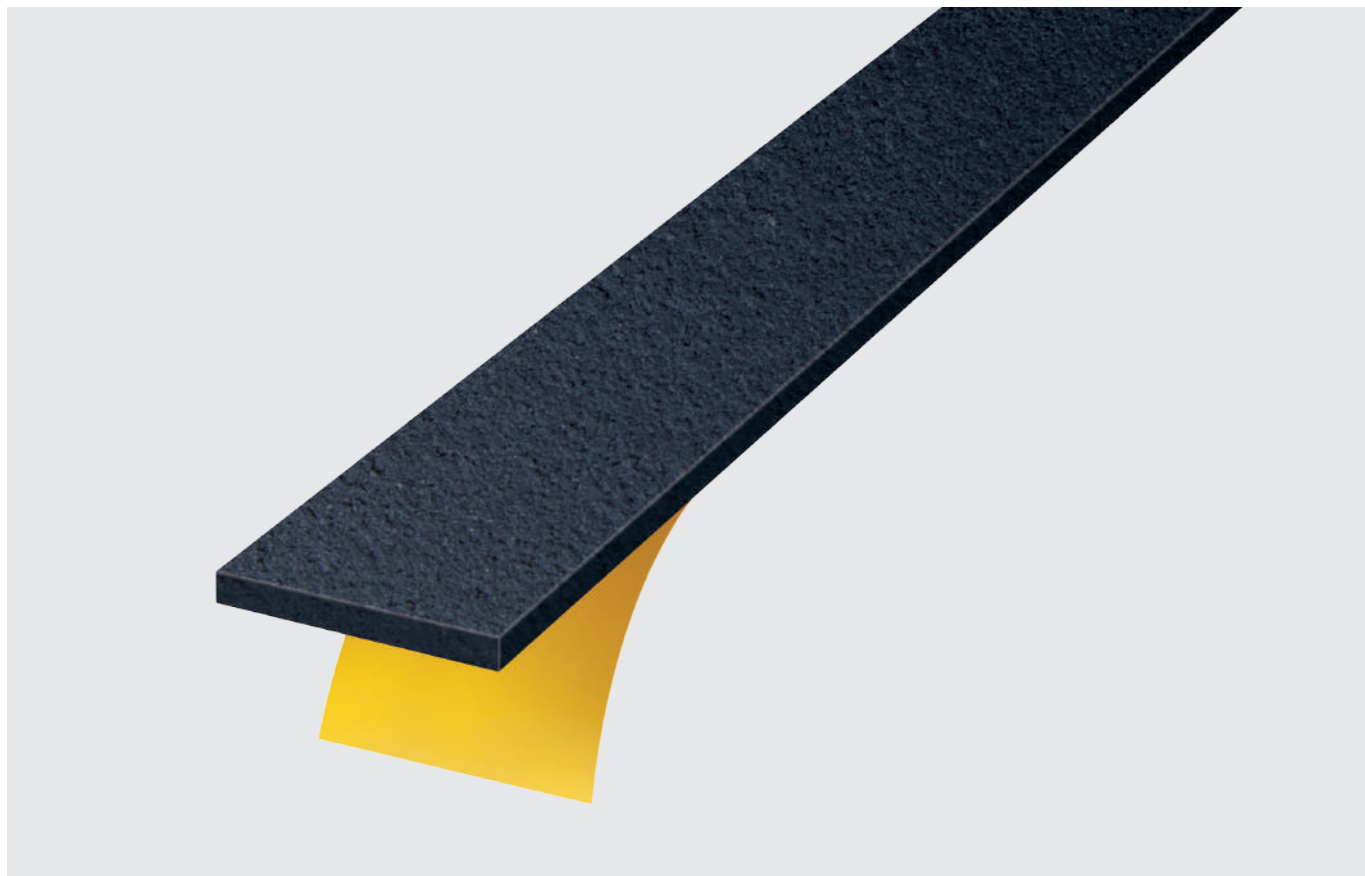

#### Specification

A graphite based intumescent fireseal contained within a PVC carrier.  
The seals are self-adhesive & are rebated into either the doorframe or the door edge.  
In the event of a fire the seal expands to many times its original volume & seals the gap around the door to provide an effective barrier against the passage of fire, smoke & hot gases.

Exitex Intumescent Fireseals are available with or without a cold smoke seal in the form of a grey nylon pile or a black neoprene rubber draught seal.

Exitex smoke seals provide a permanent barrier to smoke – particularly important as smoke fumes travel faster & further than the fire itself.

They also have acoustic & thermal applications.

#### Certifire Approved



Tested for 30 minutes with 10mm & 15mm to BS 476 part 22 & 31.1.


Tested for 60 minutes with 20mm, 25mm & 30mm to BS 476 part 22 & 31.1.

Smoke seals tested to EN1634-3.

Tested to 100,000 open / close cycles.

To seal the bottom of the door please refer to our range of weatherbars in our Weatherbars, Door Surrounds & DIY Products brochure.

## Fire only

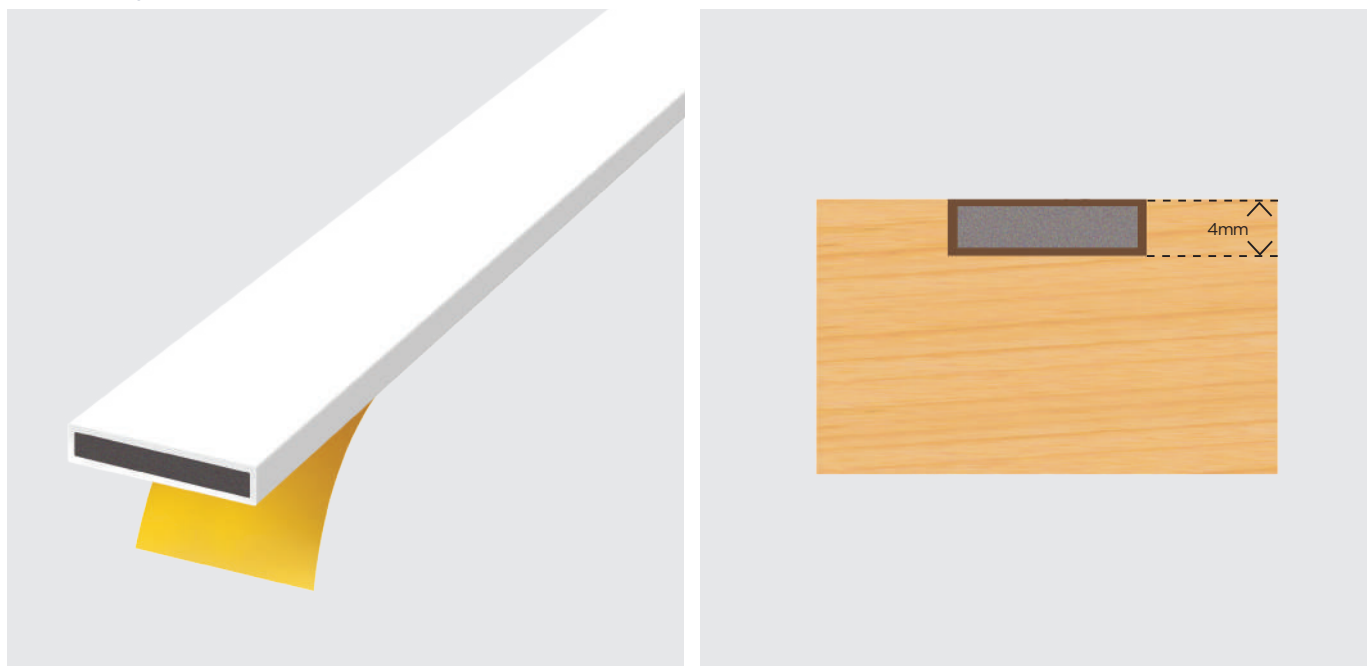

Product Ref	Profile Size	Type	Fire Rating	Length	Colours
Ref: 1.31.0001	10mm x 4mm	Fire Only	30mins	2.1m	White/Brown
Ref: 1.31.0002	15mm x 4mm	Fire Only	30mins	2.1m	White/Brown
Ref: 1.31.0003	20mm x 4mm	Fire Only	60mins	2.1m	White/Brown
Ref: 1.31.0004	25mm x 4mm	Fire Only	60mins	2.1m	White/Brown
Ref: 1.31.0005	30mm x 4mm	Fire Only	60mins	2.1m	White/Brown

## Fire & Smoke Seal



Product Ref	Profile Size	Type	Fire Rating	Length	Colours
Ref: 1.31.0101	10mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0102	15mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0103	20mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0104	25mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0105	30mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown




Fire & Smoke with Single Flipper



Product Ref	Profile Size	Type	Fire Rating	Length	Colours
Ref: 1.31.0021	10mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0022	15mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0023	20mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0024	25mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0025	30mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown

Fire & Smoke with Double Flipper

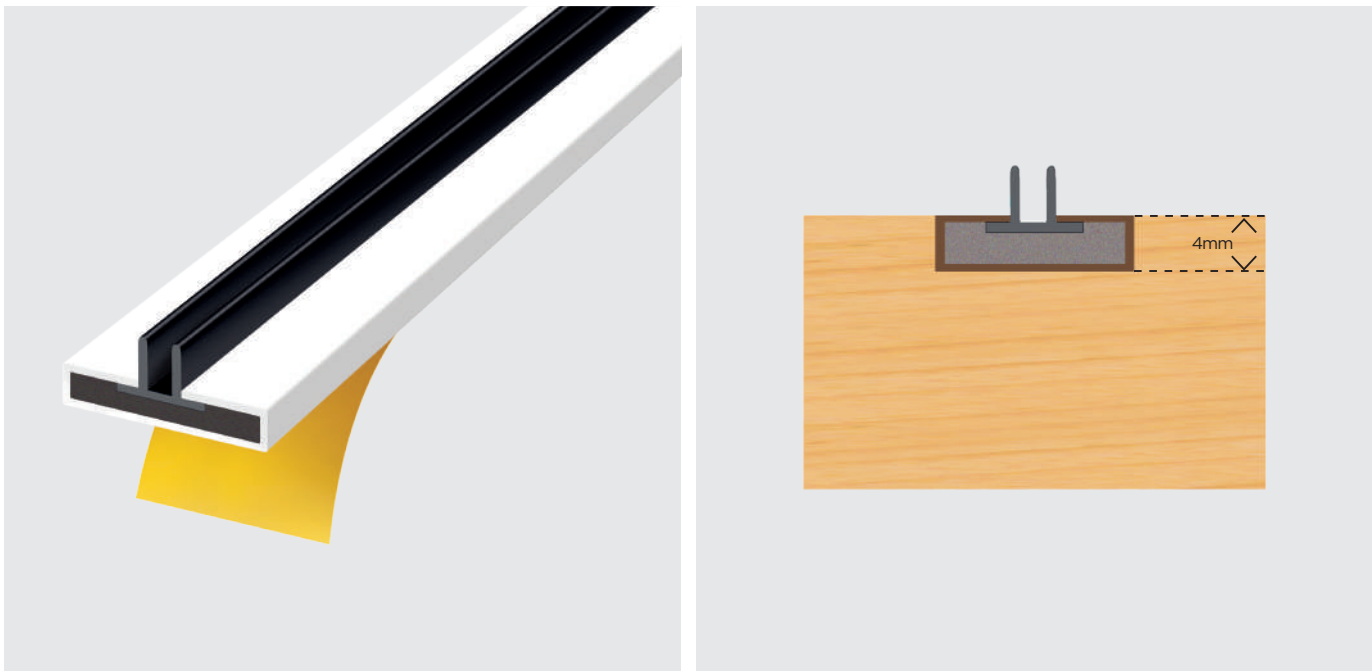

Product Ref	Profile Size	Type	Fire Rating	Length	Colours
Ref: 1.31.0011	10mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0012	15mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0013	20mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0014	25mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0015	30mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown



## Concealex A1502

Inward & Outward

Ref: 1.01.0100




Automatic Door Bottom Seal

Acoustic rating - 41db

Can be trimmed up to 100mm

In sizes 0.8m, 0.9m, 1m, 1.1m, 1.2m, 1.3m & 1.4m

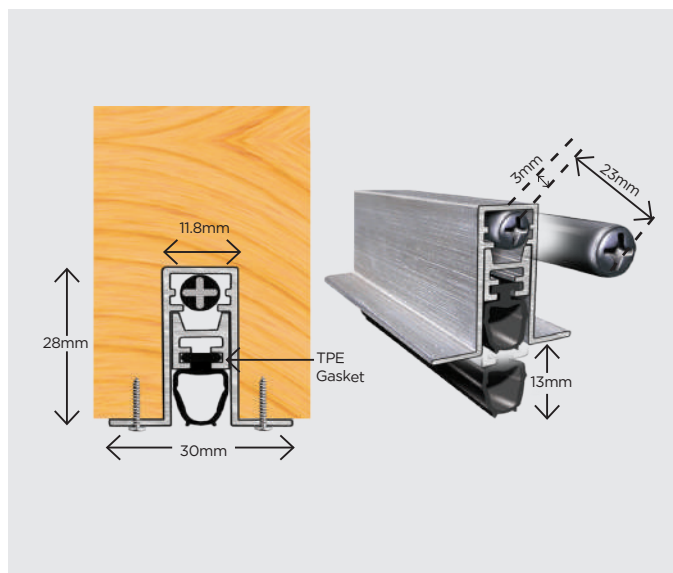

## Concealex A1001

Inward & Outward

Ref: 1.01.0101



Automatic Door Bottom Seal


Acoustic rating - 45db

Tested to DIN 18095-2 smoke control doors

Tested to DIN 4102-5 fire control doors

Can be trimmed up to 100mm

In sizes 0.8m, 0.9m, 1m, 1.1m, 1.2m, 1.3m & 1.4m

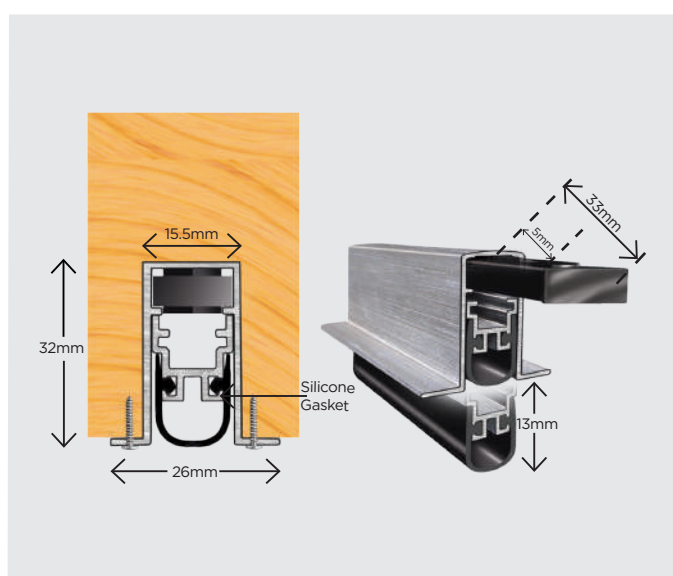

## **Brochure Range**

- \_ Acoustic Seals Range
- \_ Capex & Cresfinex
- \_ Fire Protection
- \_ Weatherbars, Door Surrounds & DIY Products

## **Exitex Limited**

Dundalk, Ireland,  
A91 HK29

+353 42 937 1244  
[info@exitex.com](mailto:info@exitex.com)

[exitex.com](http://exitex.com)

